Cyberscope

Audit Report

Pepeki

May 2023

Network	ETH
Address	0x91A3F2220112822786cd7db3d21143CaD5c59670
Audited by	© cyberscope

Table of Contents

Table of Contents 1
Review 2
Audit Updates 2
Source Files 3
Findings Breakdown 4
Analysis 5
Diagnostics 6
L02 - State Variables could be Declared Constant 7
Description 7
Recommendation 7
L04 - Conformance to Solidity Naming Conventions 8
Description 8
Recommendation 8
L05 - Unused State Variable 10
Description 10
Recommendation 10
L14 - Uninitialized Variables in Local Scope 11
Description 11
Recommendation 11
L16 - Validate Variable Setters 12
Description 12
Recommendation 12
L20 - Succeeded Transfer Check 13
Description 13
Recommendation 13
Functions Analysis 14
Inheritance Graph 18
Flow Graph 19
Summary 20
Disclaimer 21
About Cyberscope 22

Review

Contract Name	Pepeki
Compiler Version	v0.8.19+commit.7dd6d404
Optimization	500 runs
Explorer	https://etherscan.io/address/0x91a3f2220112822786cd7db3d21143cad5c59670
Address	0x91a3f2220112822786cd7db3d21143cad5c59670
Network	ETH
Symbol	PEPEKI
Decimals	9
Total Supply	420.690.000.000.000


Audit Updates

Initial Audit	11 May 2023 https://github.com/cyberscope-io/audits/blob/main/1-pepeki/v1/audit.pdf
Corrected Phase 2	12 May 2023 https://github.com/cyberscope-io/audits/blob/main/1-pepeki/v2/audit.pdf
Corrected Phase 3	22 May 2023

Source Files

Filename	SHA256
Pepeki.sol	e385aec7ab1db825c6714a156dd8a0f70b64e6c1cdd5bb9927bfc4d2e0e85377

Findings Breakdown



Critical	0
Medium	0
Minor / Informative	6

Severity	Unresolved	Acknowledged	Resolved	Other
Critical	0	0	0	0
Medium	0	0	0	0
Minor / Informative	6	0	0	0

Analysis

Critical Medium Minor / Informative Pass

Severity	Code	Description	Status
	ST	Stops Transactions	Passed
	OCTD	Transfers Contract's Tokens	Passed
	OTUT	Transfers User's Tokens	Passed
	ELFM	Exceeds Fees Limit	Passed
	ULTW	Transfers Liquidity to Team Wallet	Passed
	MT	Mints Tokens	Passed
	BT	Burns Tokens	Passed
	BC	Blacklists Addresses	Passed

Diagnostics

Critical Medium Minor / Informative

Severity	Code	Description	Status
●	L02	State Variables could be Declared Constant	Unresolved
●	L04	Conformance to Solidity Naming Conventions	Unresolved
●	L05	Unused State Variable	Unresolved
●	L14	Uninitialized Variables in Local Scope	Unresolved
●	L16	Validate Variable Setters	Unresolved
●	L20	Succeeded Transfer Check	Unresolved

L02 - State Variables could be Declared Constant

Criticality	Minor / Informative
Location	Pepeki.sol#L100,112
Status	Unresolved

Description

State variables can be declared as constant using the constant keyword. This means that the value of the state variable cannot be changed after it has been set. Additionally, the constant variables decrease gas consumption of the corresponding transaction.

```
uint256 private timeSinceLastPair = 0
bool public taxesAreLocked
```

Recommendation

Constant state variables can be useful when the contract wants to ensure that the value of a state variable cannot be changed by any function in the contract. This can be useful for storing values that are important to the contract's behavior, such as the contract's address or the maximum number of times a certain function can be called. The team is advised to add the constant keyword to state variables that never change.

L04 - Conformance to Solidity Naming Conventions

Criticality	Minor / Informative
Location	Pepeki.sol#L33,106,107,108,109,110,118,230
Status	Unresolved

Description

The Solidity style guide is a set of guidelines for writing clean and consistent Solidity code. Adhering to a style guide can help improve the readability and maintainability of the Solidity code, making it easier for others to understand and work with.

The followings are a few key points from the Solidity style guide:

1. Use camelCase for function and variable names, with the first letter in lowercase (e.g., myVariable, updateCounter).
2. Use PascalCase for contract, struct, and enum names, with the first letter in uppercase (e.g., MyContract, UserStruct, ErrorEnum).
3. Use uppercase for constant variables and enums (e.g., MAX_VALUE, ERROR_CODE).
4. Use indentation to improve readability and structure.
5. Use spaces between operators and after commas.
6. Use comments to explain the purpose and behavior of the code.
7. Keep lines short (around 120 characters) to improve readability.

```
function WETH() external pure returns (address);
uint256 constant private startingSupply = 420_690_000_000_000
string constant private _name = "Pepeki"
string constant private _symbol = "PEPEKI"
uint8 constant private _decimals = 9
uint256 constant private _tTotal = startingSupply * 10**_decimals
bool public _hasLiqBeenAdded = false
address _initializer
```

Recommendation

By following the Solidity naming convention guidelines, the codebase increased the readability, maintainability, and makes it easier to work with.
Find more information on the Solidity documentation
https://docs.soliditylang.org/en/v0.8.17/style-guide.html#naming-convention.

L05 - Unused State Variable

Criticality	Minor / Informative
Location	Pepeki.sol#L100
Status	Unresolved

Description

An unused state variable is a state variable that is declared in the contract, but is never used in any of the contract's functions. This can happen if the state variable was originally intended to be used, but was later removed or never used.

Unused state variables can create clutter in the contract and make it more difficult to understand and maintain. They can also increase the size of the contract and the cost of deploying and interacting with it.

```
uint256 private timeSinceLastPair = 0
```

Recommendation

To avoid creating unused state variables, it's important to carefully consider the state variables that are needed for the contract's functionality, and to remove any that are no longer needed. This can help improve the clarity and efficiency of the contract.

L14 - Uninitialized Variables in Local Scope

Criticality	Minor / Informative
Location	Pepeki.sol#L234
Status	Unresolved

Description

Using an uninitialized local variable can lead to unpredictable behavior and potentially cause errors in the contract. It's important to always initialize local variables with appropriate values before using them.

```
address router
address constructorLP
```

Recommendation

By initializing local variables before using them, the contract ensures that the functions behave as expected and avoid potential issues.

L16 - Validate Variable Setters

Criticality	Minor / Informative
Location	Pepeki.sol#L175
Status	Unresolved

Description

The contract performs operations on variables that have been configured on user-supplied input. These variables are missing of proper check for the case where a value is zero. This can lead to problems when the contract is executed, as certain actions may not be properly handled when the value is zero.

```
operator = newOperator
```

Recommendation

By adding the proper check, the contract will not allow the variables to be configured with zero value. This will ensure that the contract can handle all possible input values and avoid unexpected behavior or errors. Hence, it can help to prevent the contract from being exploited or operating unexpectedly.

L20 - Succeeded Transfer Check

Criticality	Minor / Informative
Location	Pepeki.sol#L336
Status	Unresolved

Description

According to the ERC20 specification, the transfer methods should be checked if the result is successful. Otherwise, the contract may wrongly assume that the transfer has been established.

```
TOKEN.transfer(_owner, TOKEN.balanceOf(address(this)))
```

Recommendation

The contract should check if the result of the transfer methods is successful. The team is advised to check the SafeERC20 library from the Openzeppelin library.

Functions Analysis


Contract	Type	Bases		
	Function Name	**Visibility**	**Mutability**	**Modifiers**
IERC20	Interface			
	totalSupply	External		-
	decimals	External		-
	symbol	External		-
	name	External		-
	getOwner	External		-
	balanceOf	External		-
	transfer	External	✓	-
	allowance	External		-
	approve	External	✓	-
	transferFrom	External	✓	-
IFactoryV2	Interface			
	getPair	External		-
	createPair	External	✓	-
IV2Pair	Interface			
	factory	External		-
	getReserves	External		-

	sync	External	✓	-
IRouter01	Interface			
	factory	External		-
	WETH	External		-
	addLiquidityETH	External	Payable	-
	addLiquidity	External	✓	-
	swapExactETHForTokens	External	Payable	-
	getAmountsOut	External		-
	getAmountsIn	External		-
IRouter02	Interface	IRouter01		
	swapExactTokensForETHSupportingFeeOnTransferTokens	External	✓	-
	swapExactETHForTokensSupportingFeeOnTransferTokens	External	Payable	-
	swapExactTokensForTokensSupportingFeeOnTransferTokens	External	✓	-
	swapExactTokensForTokens	External	✓	-
Initializer	Interface			
	setLaunch	External	✓	-
	getConfig	External	✓	-
	setLpPair	External	✓	-
Pepeki	Implementation	IERC20		


		Public	Payable	-
		External	Payable	-
	transferOwner	External	✓	onlyOwner
	renounceOwnership	External	✓	onlyOwner
	setOperator	Public	✓	-
	renounceOriginalDeployer	External	✓	-
	totalSupply	External		-
	decimals	External		-
	symbol	External		-
	name	External		-
	getOwner	External		-
	allowance	External		-
	balanceOf	Public		-
	transfer	Public	✓	-
	approve	External	✓	-
	_approve	Internal	✓	
	approveContractContingency	External	✓	onlyOwner
	transferFrom	External	✓	-
	setInitializer	External	✓	onlyOwner
	isExcludedFromProtection	External		-
	setExcludedFromProtection	External	✓	onlyOwner
	getCirculatingSupply	Public		-
	excludePresaleAddresses	External	✓	onlyOwner

	_hasLimits	Internal		
	_transfer	Internal	✓	
	_checkLiquidityAdd	Internal	✓	
	enableTrading	Public	✓	onlyOwner
	sweepBalance	External	✓	onlyOwner
	sweepExternalTokens	External	✓	onlyOwner
	multiSendTokens	External	✓	onlyOwner
	finalizeTransfer	Internal	✓	

Inheritance Graph

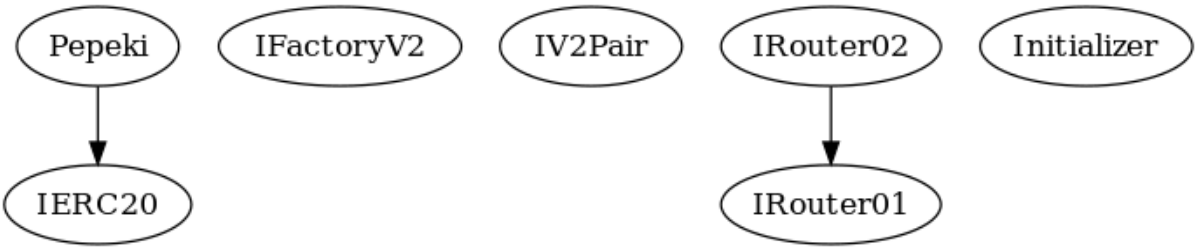

Flow Graph

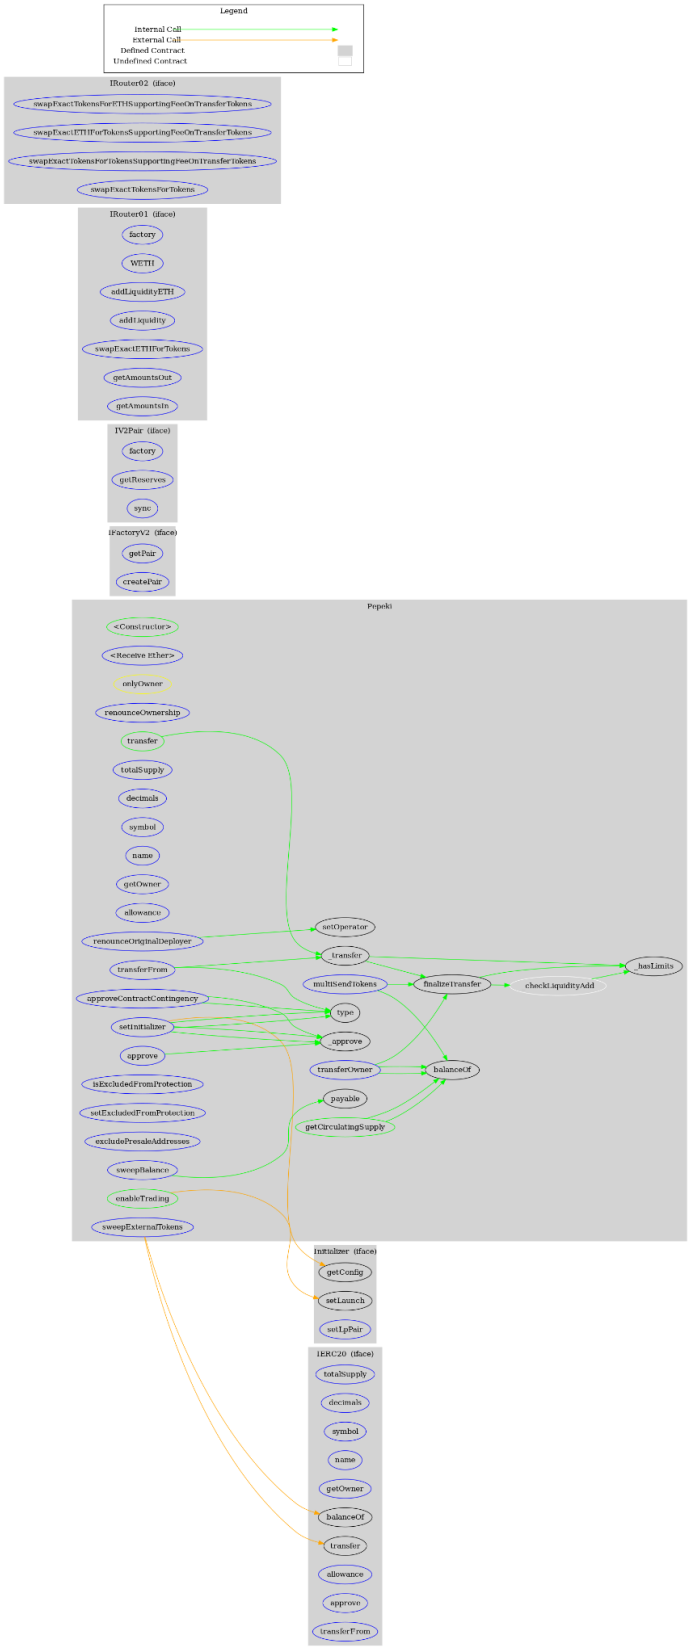
Legend
Internal Call
External Call
Defined Contract
Undefined Contract
IRouter02 (iface)
swapExactTokensForETHSupportingFeeOnTransferTokens
swapExactETHForTokensSupportingFeeOnTransferTokens
swapExactTokensForTokensSupportingFeeOnTransferTokens
swapExactTokensForTokens
IRouter01 (iface)
factory
WETH
addLiquidityETH
addLiquidity
swapExactETHForTokens
getAmountsOut
getAmountsIn
IV2Pair (iface)
factory
getReserves
sync
IFactoryV2 (iface)
getPair
createPair
Pepeki
<Constructor>
<Receive Ether>
onlyOwner
renounceOwnership
transfer
totalSupply
decimals
symbol
name
getOwner
allowance
renounceOriginalDeployer
transferFrom
approveContractContingency
setInitializer
approve
isExcludedFromProtection
setExcludedFromProtection
excludePresaleAddresses
sweepBalance
enableTrading
sweepExternalTokens
setOperator
_transfer
multiSendTokens
_type
_approve
transferOwner
payable
getCirculatingSupply
finalizeTransfer
checkLiquidityAdd
_hasLimits
balanceOf
Initializer (iface)
getConfig
setLaunch
setLpPair
IERC20 (iface)
totalSupply
decimals
symbol
name
getOwner
balanceOf
transfer
allowance
approve
transferFrom

Summary

Pepeki contract implements a token mechanism. This audit investigates security issues, business logic concerns, and potential improvements. Pepeki is an interesting project that has a friendly and growing community. The Smart Contract analysis reported no compiler errors or critical issues. The Contract Owner can access some admin functions that can not be used in a malicious way to disturb the users' transactions.

Disclaimer

The information provided in this report does not constitute investment, financial or trading advice and you should not treat any of the document's content as such. This report may not be transmitted, disclosed, referred to or relied upon by any person for any purposes nor may copies be delivered to any other person other than the Company without Cyberscope's prior written consent. This report is not nor should be considered an "endorsement" or "disapproval" of any particular project or team. This report is not nor should be regarded as an indication of the economics or value of any "product" or "asset" created by any team or project that contracts Cyberscope to perform a security assessment. This document does not provide any warranty or guarantee regarding the absolute bug-free nature of the technology analyzed, nor do they provide any indication of the technologies proprietors' business, business model or legal compliance. This report should not be used in any way to make decisions around investment or involvement with any particular project. This report represents an extensive assessment process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology.

Blockchain technology and cryptographic assets present a high level of ongoing risk Cyberscope's position is that each company and individual are responsible for their own due diligence and continuous security Cyberscope's goal is to help reduce the attack vectors and the high level of variance associated with utilizing new and consistently changing technologies and in no way claims any guarantee of security or functionality of the technology we agree to analyze. The assessment services provided by Cyberscope are subject to dependencies and are under continuing development. You agree that your access and/or use including but not limited to any services reports and materials will be at your sole risk on an as-is where-is and as-available basis Cryptographic tokens are emergent technologies and carry with them high levels of technical risk and uncertainty. The assessment reports could include false positives false negatives and other unpredictable results. The services may access and depend upon multiple layers of third parties.

About Cyberscope

Cyberscope is a blockchain cybersecurity company that was founded with the vision to make web3.0 a safer place for investors and developers. Since its launch, it has worked with thousands of projects and is estimated to have secured tens of millions of investors' funds.

Cyberscope is one of the leading smart contract audit firms in the crypto space and has built a high-profile network of clients and partners.



The Cyberscope team

https://www.cyberscope.io

Cyberscope

Audit Report

Pepeki

May 2023

SHA256 a9b6af6fccf28fd4ce60709e717d199958fcfe8353825c6e51fa848d8bb7897b

Audited by © cyberscope

Table of Contents

Table of Contents 1
Review 3
Audit Updates 3
Source Files 3
Findings Breakdown 4
Analysis 5
Diagnostics 6
L02 - State Variables could be Declared Constant 7
Description 7
Recommendation 7
L04 - Conformance to Solidity Naming Conventions 8
Description 8
Recommendation 9
L07 - Missing Events Arithmetic 10
Description 10
Recommendation 10
L09 - Dead Code Elimination 11
Description 11
Recommendation 11
L12 - Using Variables before Declaration 12
Description 12
Recommendation 12
L13 - Divide before Multiply Operation 13
Description 13
Recommendation 13
L14 - Uninitialized Variables in Local Scope 14
Description 14
Recommendation 14
L16 - Validate Variable Setters 15
Description 15
Recommendation 15
L20 - Succeeded Transfer Check 16
Description 16
Recommendation 16
Functions Analysis 17
Inheritance Graph 23
Flow Graph 24
Summary 25
Disclaimer 26

About Cyberscope **27**

Review

Testing Deploy	https://testnet.bscscan.com/address/0x5ca2c6166453f04b84dcb30736e18b6179732a3a
Address	0x5ca2c6166453f04b84dcb30736e18b6179732a3a

Audit Updates

Initial Audit	11 May 2023

Source Files

Filename	SHA256
contracts/Pepeki.sol	a9b6af6fccf28fd4ce60709e717d199958fcfe8353825c6e51fa848d8bb7897b

Findings Breakdown



Critical	0
Medium	0
Minor / Informative	9

Severity	Unresolved	Acknowledged	Resolved	Other
Critical	0	0	0	0
Medium	0	0	0	0
Minor / Informative	9	0	0	0

Analysis

Critical Medium Minor / Informative Pass

Severity	Code	Description	Status
●	ST	Stops Transactions	Passed
●	OCTD	Transfers Contract's Tokens	Passed
●	OTUT	Transfers User's Tokens	Passed
●	ELFM	Exceeds Fees Limit	Passed
●	ULTW	Transfers Liquidity to Team Wallet	Passed
●	MT	Mints Tokens	Passed
●	BT	Burns Tokens	Passed
●	BC	Blacklists Addresses	Passed

Diagnostics

Critical Medium Minor / Informative

Severity	Code	Description	Status
●	L02	State Variables could be Declared Constant	Unresolved
●	L04	Conformance to Solidity Naming Conventions	Unresolved
●	L07	Missing Events Arithmetic	Unresolved
●	L09	Dead Code Elimination	Unresolved
●	L12	Using Variables before Declaration	Unresolved
●	L13	Divide before Multiply Operation	Unresolved
●	L14	Uninitialized Variables in Local Scope	Unresolved
●	L16	Validate Variable Setters	Unresolved
●	L20	Succeeded Transfer Check	Unresolved

L02 - State Variables could be Declared Constant

Criticality	Minor / Informative
Location	contracts/Pepeki.sol#L173
Status	Unresolved

Description

State variables can be declared as constant using the constant keyword. This means that the value of the state variable cannot be changed after it has been set. Additionally, the constant variables decrease gas consumption of the corresponding transaction.

```
address public BUSD = 0xe9e7CEA3DedcA5984780Bafc599bD69ADd087D56
```

Recommendation

Constant state variables can be useful when the contract wants to ensure that the value of a state variable cannot be changed by any function in the contract. This can be useful for storing values that are important to the contract's behavior, such as the contract's address or the maximum number of times a certain function can be called. The team is advised to add the constant keyword to state variables that never change.

L04 - Conformance to Solidity Naming Conventions

Criticality	Minor / Informative
Location	contracts/Pepeki.sol#L33,116,119,128,129,130,131,132,149,155,164,165,166,167,173,182,200,452,514
Status	Unresolved

Description

The Solidity style guide is a set of guidelines for writing clean and consistent Solidity code. Adhering to a style guide can help improve the readability and maintainability of the Solidity code, making it easier for others to understand and work with.

The followings are a few key points from the Solidity style guide:

1. Use camelCase for function and variable names, with the first letter in lowercase (e.g., myVariable, updateCounter).
2. Use PascalCase for contract, struct, and enum names, with the first letter in uppercase (e.g., MyContract, UserStruct, ErrorEnum).
3. Use uppercase for constant variables and enums (e.g., MAX_VALUE, ERROR_CODE).
4. Use indentation to improve readability and structure.
5. Use spaces between operators and after commas.
6. Use comments to explain the purpose and behavior of the code.
7. Keep lines short (around 120 characters) to improve readability.

```
function WETH() external pure returns (address);
mapping (address => uint256) _tOwned
mapping (address => mapping (address => uint256)) _allowances
uint256 constant private startingSupply = 420_690_000_000_000
string constant private _name = "Pepeki"
string constant private _symbol = "PEPEKI"
uint8 constant private _decimals = 9
uint256 constant private _tTotal = startingSupply * (10 ** _decimals)

Fees public _taxRates = Fees({
        buyFee: 700,
        sellFee: 700,
        transferFee: 0
    })

...
```

Recommendation

By following the Solidity naming convention guidelines, the codebase increased the readability, and maintainability, and makes it easier to work with.

Find more information on the Solidity documentation

https://docs.soliditylang.org/en/v0.8.17/style-guide.html#naming-convention.

L07 - Missing Events Arithmetic

Criticality	Minor / Informative
Location	contracts/Pepeki.sol#L494,504,521
Status	Unresolved

Description

Events are a way to record and log information about changes or actions that occur within a contract. They are often used to notify external parties or clients about events that have occurred within the contract, such as the transfer of tokens or the completion of a task.

It's important to carefully design and implement the events in a contract, and to ensure that all required events are included. It's also a good idea to test the contract to ensure that all events are being properly triggered and logged.

```
swapThreshold = (_tTotal * thresholdPercent) / thresholdDivisor
piSwapPercent = priceImpactSwapPercent
cashierGas = gas
```

Recommendation

By including all required events in the contract and thoroughly testing the contract's functionality, the contract ensures that it performs as intended and does not have any missing events that could cause issues with its arithmetic.

L09 - Dead Code Elimination

Criticality	Minor / Informative
Location	contracts/Pepeki.sol#L560
Status	Unresolved

Description

In Solidity, dead code is code that is written in the contract but is never executed or reached during normal contract execution. Dead code can occur for a variety of reasons, such as:

- Conditional statements that are always false.
- Functions that are never called.
- Unreachable code (e.g., code that follows a return statement).

Dead code can make a contract more difficult to understand and maintain, and can also increase the size of the contract and the cost of deploying and interacting with it.

```
function _basicTransfer(address from, address to, uint256 amount) internal
returns (bool) {
        _tOwned[from] -= amount;
        _tOwned[to] += amount;
        emit Transfer(from, to, amount);
        return true;
    }
```

Recommendation

To avoid creating dead code, it's important to carefully consider the logic and flow of the contract and to remove any code that is not needed or that is never executed. This can help improve the clarity and efficiency of the contract.

L12 - Using Variables before Declaration

Criticality	Minor / Informative
Location	contracts/Pepeki.sol#L715,727
Status	Unresolved

Description

The contract is using a variable before the declaration. This is usually happening either if it has not been declared yet or if the variable has been declared in a different scope. It is not a good practice to use a local variable before it has been declared.

```
uint256 initSwapAmount
uint256 initThreshold
bool check
```

Recommendation

By declaring local variables before using them, the contract ensures that it operates correctly. It's important to be aware of this rule when working with local variables, as using a variable before it has been declared can lead to unexpected behavior and can be difficult to debug.

L13 - Divide before Multiply Operation

Criticality	Minor / Informative
Location	contracts/Pepeki.sol#L620,638,786,787
Status	Unresolved

Description

It is important to be aware of the order of operations when performing arithmetic calculations. This is especially important when working with large numbers, as the order of operations can affect the final result of the calculation. Performing divisions before multiplications may cause a loss of prediction.

```
uint256 toLiquify = ((contractTokenBalance * ratios.liquidity) /
(ratios.total)) / 2
uint256 liquidityBalance = (amtBalance * toLiquify) / swapAmt
```

Recommendation

To avoid this issue, it is recommended to carefully consider the order of operations when performing arithmetic calculations in Solidity. It's generally a good idea to use parentheses to specify the order of operations. The basic rule is that the multiplications should be prior to the divisions.

L14 - Uninitialized Variables in Local Scope

Criticality	Minor / Informative
Location	contracts/Pepeki.sol#L715,726,727
Status	Unresolved

Description

Using an uninitialized local variable can lead to unpredictable behavior and potentially cause errors in the contract. It's important to always initialize local variables with appropriate values before using them.

```
uint256 initThreshold
uint256 initSwapAmount
bool checked
bool check
```

Recommendation

By initializing local variables before using them, the contract ensures that the functions behave as expected and avoid potential issues.

L16 - Validate Variable Setters

Criticality	Minor / Informative
Location	contracts/Pepeki.sol#L313
Status	Unresolved

Description

The contract performs operations on variables that have been configured on user-supplied input. These variables are missing of proper check for the case where a value is zero. This can lead to problems when the contract is executed, as certain actions may not be properly handled when the value is zero.

```
operator = newOperator
```

Recommendation

By adding the proper check, the contract will not allow the variables to be configured with zero value. This will ensure that the contract can handle all possible input values and avoid unexpected behavior or errors. Hence, it can help to prevent the contract from being exploited or operating unexpectedly.

L20 - Succeeded Transfer Check

Criticality	Minor / Informative
Location	contracts/Pepeki.sol#L684,687,823
Status	Unresolved

Description

According to the ERC20 specification, the transfer methods should be checked if the result is successful. Otherwise, the contract may wrongly assume that the transfer has been established.

```
try _BUSD.transfer(_taxWallets.marketing, marketingBalance) {} catch {}
try _BUSD.transfer(_taxWallets.rewardsPool, rewardsPoolBalance) {} catch
{}
TOKEN.transfer(_owner, TOKEN.balanceOf(address(this)))
```

Recommendation

The contract should check if the result of the transfer methods is successful. The team is advised to check the SafeERC20 library from the Openzeppelin library.

Functions Analysis

Contract	Type	Bases		
	Function Name	**Visibility**	**Mutability**	**Modifiers**
IERC20	Interface			
	totalSupply	External		-
	decimals	External		-
	symbol	External		-
	name	External		-
	getOwner	External		-
	balanceOf	External		-
	transfer	External	✓	-
	allowance	External		-
	approve	External	✓	-
	transferFrom	External	✓	-
IFactoryV2	Interface			
	getPair	External		-
	createPair	External	✓	-
IV2Pair	Interface			
	factory	External		-

	getReserves	External		-
	sync	External	✓	-
IRouter01	Interface			
	factory	External		-
	WETH	External		-
	addLiquidityETH	External	Payable	-
	addLiquidity	External	✓	-
	swapExactETHForTokens	External	Payable	-
	getAmountsOut	External		-
	getAmountsIn	External		-
IRouter02	Interface	IRouter01		
	swapExactTokensForETHSupportingFeeOnTransferTokens	External	✓	-
	swapExactETHForTokensSupportingFeeOnTransferTokens	External	Payable	-
	swapExactTokensForTokensSupportingFeeOnTransferTokens	External	✓	-
	swapExactTokensForTokens	External	✓	-
Protections	Interface			
	checkUser	External	✓	-
	setLaunch	External	✓	-
	getInits	External	✓	-
	setLpPair	External	✓	-


	setProtections	External	✓	-
	removeSniper	External	✓	-
Cashier	Interface			
	setRewardsProperties	External	✓	-
	tally	External	✓	-
	tallyZero	External	✓	-
	load	External	Payable	-
	cashout	External	✓	-
	giveMeWelfarePlease	External	✓	-
	getTotalDistributed	External		-
	getUserInfo	External		-
	getUserRealizedRewards	External		-
	getPendingRewards	External		-
	initialize	External	✓	-
	getCurrentReward	External		-
Pepeki	Implementation	IERC20		
		Public	Payable	-
	transferOwner	External	✓	onlyOwner
	renounceOwnership	External	✓	onlyOwner
	setOperator	Public	✓	-
	renounceOriginalDeployer	External	✓	-

		External	Payable	-
	totalSupply	External		-
	decimals	External		-
	symbol	External		-
	name	External		-
	getOwner	External		-
	balanceOf	Public		-
	allowance	External		-
	approve	External	✓	-
	_approve	Internal	✓	
	approveContractContingency	Public	✓	onlyOwner
	transfer	External	✓	-
	transferFrom	External	✓	-
	setNewRouter	External	✓	onlyOwner
	setLpPair	External	✓	onlyOwner
	setInitializers	External	✓	onlyOwner
	isExcludedFromFees	External		-
	isExcludedFromDividends	External		-
	isExcludedFromProtection	External		-
	isExcludedFromLimits	External		-
	setExcludedFromLimits	External	✓	onlyOwner
	setDividendExcluded	Public	✓	onlyOwner
	setExcludedFromFees	Public	✓	onlyOwner


	setExcludedFromProtection	External	✓	onlyOwner
	removeSniper	External	✓	onlyOwner
	setProtectionSettings	External	✓	onlyOwner
	setWallets	External	✓	onlyOwner
	lockTaxes	External	✓	onlyOwner
	setTaxes	External	✓	onlyOwner
	setRatios	External	✓	onlyOwner
	getTokenAmountAtPriceImpact	External		-
	setSwapSettings	External	✓	onlyOwner
	setPriceImpactSwapAmount	External	✓	onlyOwner
	setContractSwapEnabled	External	✓	onlyOwner
	setRewardsProperties	External	✓	onlyOwner
	setReflectorSettings	External	✓	onlyOwner
	excludePresaleAddresses	External	✓	onlyOwner
	_hasLimits	Internal		
	_basicTransfer	Internal	✓	
	_transfer	Internal	✓	
	contractSwap	Internal	✓	inSwapFlag
	_checkLiquidityAdd	Private	✓	
	enableTrading	Public	✓	onlyOwner
	finalizeTransfer	Internal	✓	
	processRewards	Internal	✓	
	manualProcess	External	✓	-

	takeTaxes	Internal	✓	
	multiSendTokens	External	✓	onlyOwner
	manualDeposit	External	✓	onlyOwner
	sweepContingency	External	✓	onlyOwner
	sweepExternalTokens	External	✓	onlyOwner
	claimPendingRewards	External	✓	-
	getTotalReflected	External		-
	getUserInfo	External		-
	getUserRealizedGains	External		-
	getUserUnpaidEarnings	External		-
	getCurrentReward	External		-

Inheritance Graph

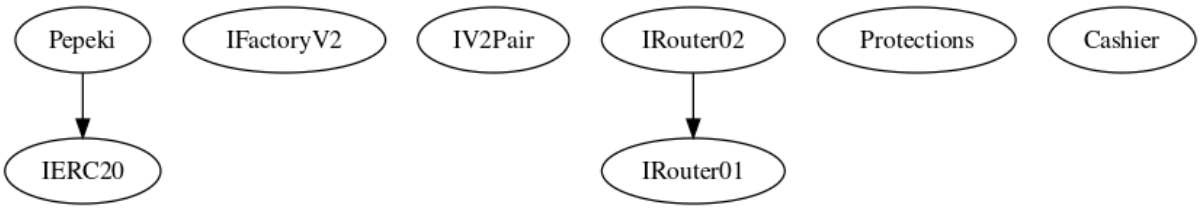

Flow Graph

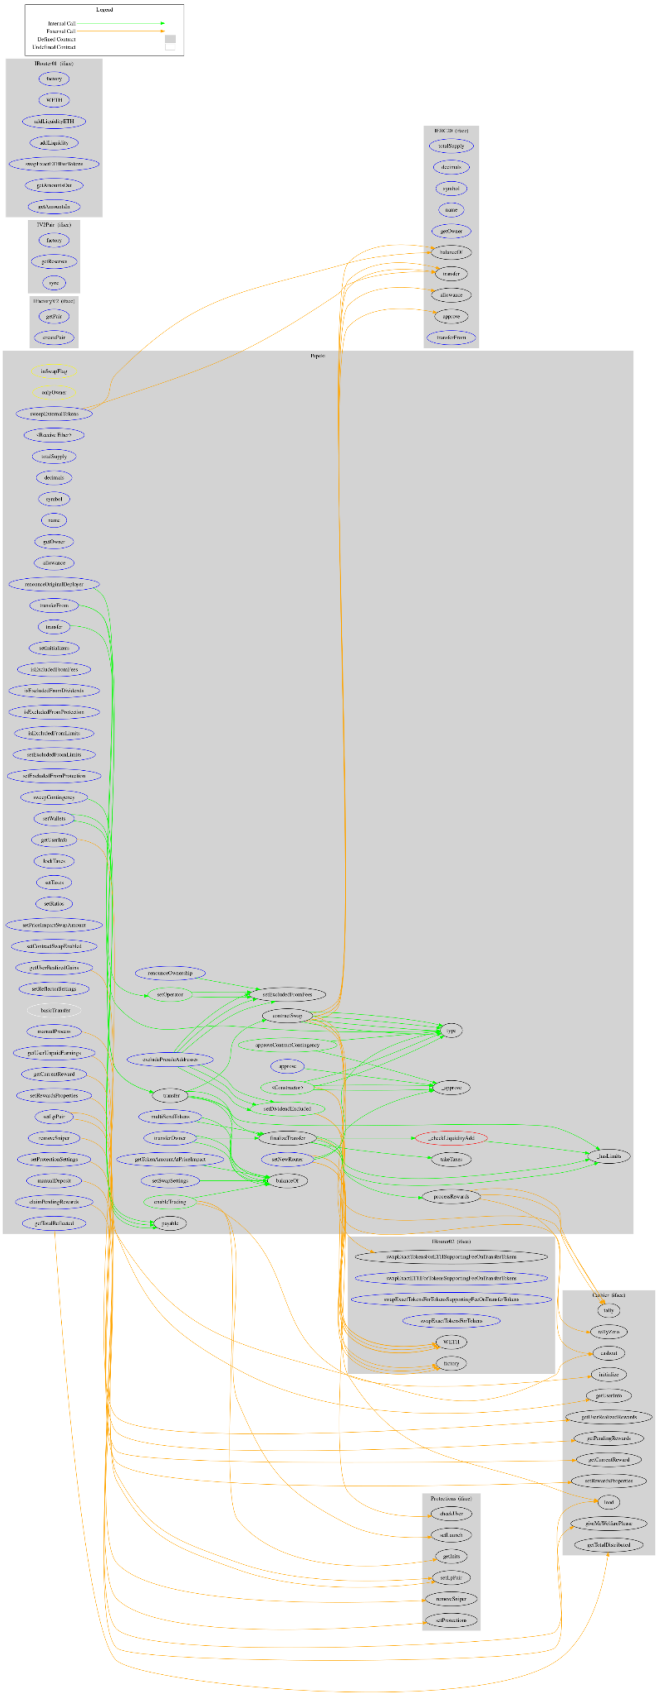

Summary

Pepeki contract implements a token mechanism. This audit investigates security issues, business logic concerns, and potential improvements. Pepeki is an interesting project that has a friendly and growing community. The Smart Contract analysis reported no compiler errors or critical issues. The contract Owner can access some admin functions that can not be used in a malicious way to disturb the users' transactions. There is also a limit of max 10% buy, sell, and transfer fees.

Disclaimer

The information provided in this report does not constitute investment, financial or trading advice and you should not treat any of the document's content as such. This report may not be transmitted, disclosed, referred to or relied upon by any person for any purposes nor may copies be delivered to any other person other than the Company without Cyberscope's prior written consent. This report is not nor should be considered an "endorsement" or "disapproval" of any particular project or team. This report is not nor should be regarded as an indication of the economics or value of any "product" or "asset" created by any team or project that contracts Cyberscope to perform a security assessment. This document does not provide any warranty or guarantee regarding the absolute bug-free nature of the technology analyzed, nor do they provide any indication of the technologies proprietors' business, business model or legal compliance. This report should not be used in any way to make decisions around investment or involvement with any particular project. This report represents an extensive assessment process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology.

Blockchain technology and cryptographic assets present a high level of ongoing risk Cyberscope's position is that each company and individual are responsible for their own due diligence and continuous security Cyberscope's goal is to help reduce the attack vectors and the high level of variance associated with utilizing new and consistently changing technologies and in no way claims any guarantee of security or functionality of the technology we agree to analyze. The assessment services provided by Cyberscope are subject to dependencies and are under continuing development. You agree that your access and/or use including but not limited to any services reports and materials will be at your sole risk on an as-is where-is and as-available basis Cryptographic tokens are emergent technologies and carry with them high levels of technical risk and uncertainty. The assessment reports could include false positives false negatives and other unpredictable results. The services may access and depend upon multiple layers of third parties.

About Cyberscope

Cyberscope is a blockchain cybersecurity company that was founded with the vision to make web3.0 a safer place for investors and developers. Since its launch, it has worked with thousands of projects and is estimated to have secured tens of millions of investors' funds.

Cyberscope is one of the leading smart contract audit firms in the crypto space and has built a high-profile network of clients and partners.



The Cyberscope team

https://www.cyberscope.io

Cyberscope

Audit Report

Pepeki

May 2023

Network BSC

Address 0x192eb3e89C09590dDB86AF1172094b0719a67B34

Audited by © cyberscope

Table of Contents

Table of Contents 1
Review 3
Audit Updates 3
Source Files 3
Findings Breakdown 4
Analysis 5
Diagnostics 6
IDI - Immutable Declaration Improvement 7
Description 7
Recommendation 7
L04 - Conformance to Solidity Naming Conventions 8
Description 8
Recommendation 9
L07 - Missing Events Arithmetic 10
Description 10
Recommendation 10
L09 - Dead Code Elimination 11
Description 11
Recommendation 11
L12 - Using Variables before Declaration 12
Description 12
Recommendation 12
L13 - Divide before Multiply Operation 13
Description 13
Recommendation 13
L14 - Uninitialized Variables in Local Scope 14
Description 14
Recommendation 14
L16 - Validate Variable Setters 15
Description 15
Recommendation 15
L20 - Succeeded Transfer Check 16
Description 16
Recommendation 16
Functions Analysis 17
Inheritance Graph 23
Flow Graph 24
Summary 25
Disclaimer 26

About Cyberscope **27**

Review

Contract Name	Pepeki
Compiler Version	v0.8.19+commit.7dd6d404
Optimization	500 runs
Explorer	https://bscscan.com/address/0x192eb3e89c09590ddb86af1172094b0719a67b34
Address	0x192eb3e89c09590ddb86af1172094b0719a67b34
Network	BSC
Symbol	PEPEKI
Decimals	9
Total Supply	420,690,000,000,000

Audit Updates

Initial Audit	11 May 2023 https://github.com/cyberscope-io/audits/blob/main/1-pepeki/v1/audit.pdf
Corrected Phase 2	12 May 2023

Source Files

Filename	SHA256
Pepeki.sol	6d0af0b589419879f106aa8c7d478f0a281d8af5f13f48d2627ea41278db1387

Findings Breakdown



Critical	0
Medium	0
Minor / Informative	9

Severity	Unresolved	Acknowledged	Resolved	Other
Critical	0	0	0	0
Medium	0	0	0	0
Minor / Informative	9	0	0	0

Analysis

Critical Medium Minor / Informative Pass

Severity	Code	Description	Status
●	ST	Stops Transactions	Passed
●	OCTD	Transfers Contract's Tokens	Passed
●	OTUT	Transfers User's Tokens	Passed
●	ELFM	Exceeds Fees Limit	Passed
●	ULTW	Transfers Liquidity to Team Wallet	Passed
●	MT	Mints Tokens	Passed
●	BT	Burns Tokens	Passed
●	BC	Blacklists Addresses	Passed

Diagnostics

Critical Medium Minor / Informative

Severity	Code	Description	Status
●	IDI	Immutable Declaration Improvement	Unresolved
●	L04	Conformance to Solidity Naming Conventions	Unresolved
●	L07	Missing Events Arithmetic	Unresolved
●	L09	Dead Code Elimination	Unresolved
●	L12	Using Variables before Declaration	Unresolved
●	L13	Divide before Multiply Operation	Unresolved
●	L14	Uninitialized Variables in Local Scope	Unresolved
●	L16	Validate Variable Setters	Unresolved
●	L20	Succeeded Transfer Check	Unresolved

IDI - Immutable Declaration Improvement

Criticality	Minor / Informative
Location	Pepeki.sol#L225
Status	Unresolved

Description

The contract is using variables that initialize them only in the constructor. The other functions are not mutating the variables. These variables are not defined as `immutable`.

```
BUSD
```

Recommendation

By declaring a variable as immutable, the Solidity compiler is able to make certain optimizations. This can reduce the amount of storage and computation required by the contract, and make it more gas-efficient.

L04 - Conformance to Solidity Naming Conventions

Criticality	Minor / Informative
Location	Pepeki.sol#L33,116,119,128,129,130,131,132,149,155,164,165,166,167,173,182,200,453,515
Status	Unresolved

Description

The Solidity style guide is a set of guidelines for writing clean and consistent Solidity code. Adhering to a style guide can help improve the readability and maintainability of the Solidity code, making it easier for others to understand and work with.

The followings are a few key points from the Solidity style guide:

1. Use camelCase for function and variable names, with the first letter in lowercase (e.g., myVariable, updateCounter).
2. Use PascalCase for contract, struct, and enum names, with the first letter in uppercase (e.g., MyContract, UserStruct, ErrorEnum).
3. Use uppercase for constant variables and enums (e.g., MAX_VALUE, ERROR_CODE).
4. Use indentation to improve readability and structure.
5. Use spaces between operators and after commas.
6. Use comments to explain the purpose and behavior of the code.
7. Keep lines short (around 120 characters) to improve readability.

```
function WETH() external pure returns (address);
mapping (address => uint256) _tOwned
mapping (address => mapping (address => uint256)) _allowances
uint256 constant private startingSupply = 420_690_000_000_000
string constant private _name = "Pepeki"
string constant private _symbol = "PEPEKI"
uint8 constant private _decimals = 9
uint256 constant private _tTotal = startingSupply * (10 ** _decimals)

Fees public _taxRates = Fees({
        buyFee: 700,
        sellFee: 700,
        transferFee: 0
    })

...
```

Recommendation

By following the Solidity naming convention guidelines, the codebase increased the readability, maintainability, and makes it easier to work with.

Find more information on the Solidity documentation

https://docs.soliditylang.org/en/v0.8.17/style-guide.html#naming-convention.

L07 - Missing Events Arithmetic

Criticality	Minor / Informative
Location	Pepeki.sol#L495,505,522
Status	Unresolved

Description

Events are a way to record and log information about changes or actions that occur within a contract. They are often used to notify external parties or clients about events that have occurred within the contract, such as the transfer of tokens or the completion of a task.

It's important to carefully design and implement the events in a contract, and to ensure that all required events are included. It's also a good idea to test the contract to ensure that all events are being properly triggered and logged.

```
swapThreshold = (_tTotal * thresholdPercent) / thresholdDivisor
piSwapPercent = priceImpactSwapPercent
cashierGas = gas
```

Recommendation

By including all required events in the contract and thoroughly testing the contract's functionality, the contract ensures that it performs as intended and does not have any missing events that could cause issues with its arithmetic.

L09 - Dead Code Elimination

Criticality	Minor / Informative
Location	Pepeki.sol#L561
Status	Unresolved

Description

In Solidity, dead code is code that is written in the contract, but is never executed or reached during normal contract execution. Dead code can occur for a variety of reasons, such as:

- Conditional statements that are always false.
- Functions that are never called.
- Unreachable code (e.g., code that follows a return statement).

Dead code can make a contract more difficult to understand and maintain, and can also increase the size of the contract and the cost of deploying and interacting with it.

```
function _basicTransfer(address from, address to, uint256 amount) internal
returns (bool) {
        _tOwned[from] -= amount;
        _tOwned[to] += amount;
        emit Transfer(from, to, amount);
        return true;
    }
```

Recommendation

To avoid creating dead code, it's important to carefully consider the logic and flow of the contract and to remove any code that is not needed or that is never executed. This can help improve the clarity and efficiency of the contract.

L12 - Using Variables before Declaration

Criticality	Minor / Informative
Location	Pepeki.sol#L715,727
Status	Unresolved

Description

The contract is using a variable before the declaration. This is usually happening either if it has not been declared yet or if the variable has been declared in a different scope. It is not a good practice to use a local variable before it has been declared.

```
uint256 initSwapAmount
uint256 initThreshold
bool check
```

Recommendation

By declaring local variables before using them, the contract ensures that it operates correctly. It's important to be aware of this rule when working with local variables, as using a variable before it has been declared can lead to unexpected behavior and can be difficult to debug.

L13 - Divide before Multiply Operation

Criticality	Minor / Informative
Location	Pepeki.sol#L621,639,786,787
Status	Unresolved

Description

It is important to be aware of the order of operations when performing arithmetic calculations. This is especially important when working with large numbers, as the order of operations can affect the final result of the calculation. Performing divisions before multiplications may cause a loss of prediction.

```
uint256 feeAmount = amount * currentFee / masterTaxDivisor
uint256 burnAmt = (feeAmount * ratios.burn) / total
```

Recommendation

To avoid this issue, it is recommended to carefully consider the order of operations when performing arithmetic calculations in Solidity. It's generally a good idea to use parentheses to specify the order of operations. The basic rule is that the multiplications should be prior to the divisions.

L14 - Uninitialized Variables in Local Scope

Criticality	Minor / Informative
Location	Pepeki.sol#L715,726,727
Status	Unresolved

Description

Using an uninitialized local variable can lead to unpredictable behavior and potentially cause errors in the contract. It's important to always initialize local variables with appropriate values before using them.

```
uint256 initThreshold
uint256 initSwapAmount
bool checked
bool check
```

Recommendation

By initializing local variables before using them, the contract ensures that the functions behave as expected and avoid potential issues.

L16 - Validate Variable Setters

Criticality	Minor / Informative
Location	Pepeki.sol#L314
Status	Unresolved

Description

The contract performs operations on variables that have been configured on user-supplied input. These variables are missing of proper check for the case where a value is zero. This can lead to problems when the contract is executed, as certain actions may not be properly handled when the value is zero.

```
operator = newOperator
```

Recommendation

By adding the proper check, the contract will not allow the variables to be configured with zero value. This will ensure that the contract can handle all possible input values and avoid unexpected behavior or errors. Hence, it can help to prevent the contract from being exploited or operating unexpectedly.

L20 - Succeeded Transfer Check

Criticality	Minor / Informative
Location	Pepeki.sol#L684,687,823
Status	Unresolved

Description

According to the ERC20 specification, the transfer methods should be checked if the result is successful. Otherwise, the contract may wrongly assume that the transfer has been established.

```
try _BUSD.transfer(_taxWallets.marketing, marketingBalance) {} catch {}
try _BUSD.transfer(_taxWallets.rewardsPool, rewardsPoolBalance) {} catch
{}
TOKEN.transfer(_owner, TOKEN.balanceOf(address(this)))
```

Recommendation

The contract should check if the result of the transfer methods is successful. The team is advised to check the SafeERC20 library from the Openzeppelin library.

Functions Analysis

Contract	Type	Bases		
	Function Name	**Visibility**	**Mutability**	**Modifiers**
IERC20	Interface			
	totalSupply	External		-
	decimals	External		-
	symbol	External		-
	name	External		-
	getOwner	External		-
	balanceOf	External		-
	transfer	External	✓	-
	allowance	External		-
	approve	External	✓	-
	transferFrom	External	✓	-
IFactoryV2	Interface			
	getPair	External		-
	createPair	External	✓	-
IV2Pair	Interface			
	factory	External		-

	getReserves	External		-
	sync	External	✓	-
IRouter01	Interface			
	factory	External		-
	WETH	External		-
	addLiquidityETH	External	Payable	-
	addLiquidity	External	✓	-
	swapExactETHForTokens	External	Payable	-
	getAmountsOut	External		-
	getAmountsIn	External		-
IRouter02	Interface	IRouter01		
	swapExactTokensForETHSupportingFeeOnTransferTokens	External	✓	-
	swapExactETHForTokensSupportingFeeOnTransferTokens	External	Payable	-
	swapExactTokensForTokensSupportingFeeOnTransferTokens	External	✓	-
	swapExactTokensForTokens	External	✓	-
Protections	Interface			
	checkUser	External	✓	-
	setLaunch	External	✓	-
	getInits	External	✓	-
	setLpPair	External	✓	-


	setProtections	External	✓	-
	removeSniper	External	✓	-
Cashier	Interface			
	setRewardsProperties	External	✓	-
	tally	External	✓	-
	tallyZero	External	✓	-
	load	External	Payable	-
	cashout	External	✓	-
	giveMeWelfarePlease	External	✓	-
	getTotalDistributed	External		-
	getUserInfo	External		-
	getUserRealizedRewards	External		-
	getPendingRewards	External		-
	initialize	External	✓	-
	getCurrentReward	External		-
Pepeki	Implementation	IERC20		
		Public	Payable	-
	transferOwner	External	✓	onlyOwner
	renounceOwnership	External	✓	onlyOwner
	setOperator	Public	✓	-
	renounceOriginalDeployer	External	✓	-

		External	Payable	-
	totalSupply	External		-
	decimals	External		-
	symbol	External		-
	name	External		-
	getOwner	External		-
	balanceOf	Public		-
	allowance	External		-
	approve	External	✓	-
	_approve	Internal	✓	
	approveContractContingency	Public	✓	onlyOwner
	transfer	External	✓	-
	transferFrom	External	✓	-
	setNewRouter	External	✓	onlyOwner
	setLpPair	External	✓	onlyOwner
	setInitializers	External	✓	onlyOwner
	isExcludedFromFees	External		-
	isExcludedFromDividends	External		-
	isExcludedFromProtection	External		-
	isExcludedFromLimits	External		-
	setExcludedFromLimits	External	✓	onlyOwner
	setDividendExcluded	Public	✓	onlyOwner
	setExcludedFromFees	Public	✓	onlyOwner


	setExcludedFromProtection	External	✓	onlyOwner
	removeSniper	External	✓	onlyOwner
	setProtectionSettings	External	✓	onlyOwner
	setWallets	External	✓	onlyOwner
	lockTaxes	External	✓	onlyOwner
	setTaxes	External	✓	onlyOwner
	setRatios	External	✓	onlyOwner
	getTokenAmountAtPriceImpact	External		-
	setSwapSettings	External	✓	onlyOwner
	setPriceImpactSwapAmount	External	✓	onlyOwner
	setContractSwapEnabled	External	✓	onlyOwner
	setRewardsProperties	External	✓	onlyOwner
	setReflectorSettings	External	✓	onlyOwner
	excludePresaleAddresses	External	✓	onlyOwner
	_hasLimits	Internal		
	_basicTransfer	Internal	✓	
	_transfer	Internal	✓	
	contractSwap	Internal	✓	inSwapFlag
	_checkLiquidityAdd	Private	✓	
	enableTrading	Public	✓	onlyOwner
	finalizeTransfer	Internal	✓	
	processRewards	Internal	✓	
	manualProcess	External	✓	-

	takeTaxes	Internal	✓	
	multiSendTokens	External	✓	onlyOwner
	manualDeposit	External	✓	onlyOwner
	sweepContingency	External	✓	onlyOwner
	sweepExternalTokens	External	✓	onlyOwner
	claimPendingRewards	External	✓	-
	getTotalReflected	External		-
	getUserInfo	External		-
	getUserRealizedGains	External		-
	getUserUnpaidEarnings	External		-
	getCurrentReward	External		-

Inheritance Graph

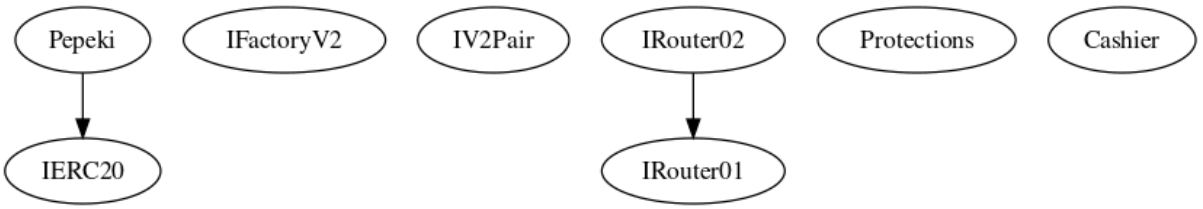

Flow Graph

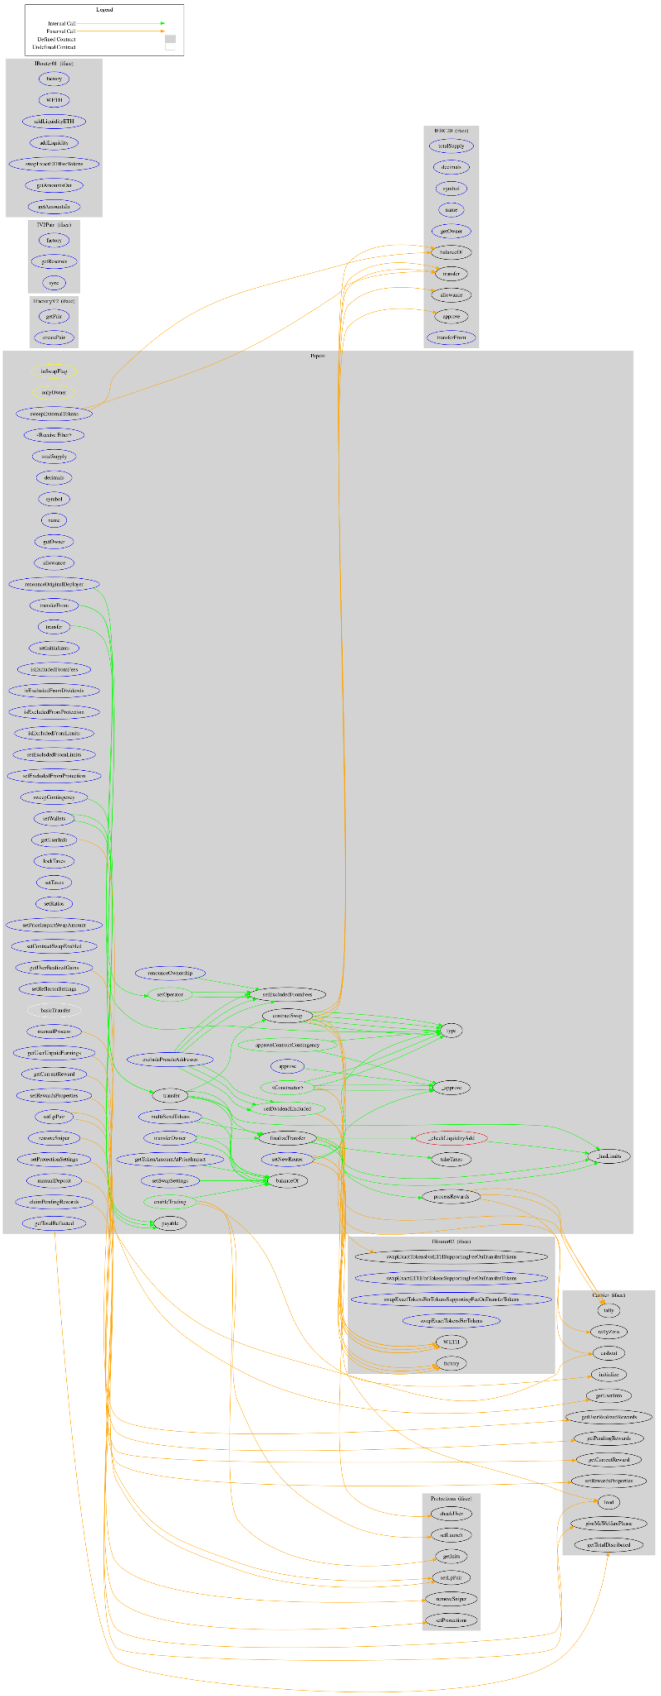

Summary

Pepeki contract implements a token mechanism. This audit investigates security issues, business logic concerns, and potential improvements. Pepeki is an interesting project that has a friendly and growing community. The Smart Contract analysis reported no compiler errors or critical issues. The contract Owner can access some admin functions that can not be used in a malicious way to disturb the users' transactions. There is also a limit of max 10% buy, sell, and transfer fees.

Disclaimer

The information provided in this report does not constitute investment, financial or trading advice and you should not treat any of the document's content as such. This report may not be transmitted, disclosed, referred to or relied upon by any person for any purposes nor may copies be delivered to any other person other than the Company without Cyberscope's prior written consent. This report is not nor should be considered an "endorsement" or "disapproval" of any particular project or team. This report is not nor should be regarded as an indication of the economics or value of any "product" or "asset" created by any team or project that contracts Cyberscope to perform a security assessment. This document does not provide any warranty or guarantee regarding the absolute bug-free nature of the technology analyzed, nor do they provide any indication of the technologies proprietors' business, business model or legal compliance. This report should not be used in any way to make decisions around investment or involvement with any particular project. This report represents an extensive assessment process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology.

Blockchain technology and cryptographic assets present a high level of ongoing risk Cyberscope's position is that each company and individual are responsible for their own due diligence and continuous security Cyberscope's goal is to help reduce the attack vectors and the high level of variance associated with utilizing new and consistently changing technologies and in no way claims any guarantee of security or functionality of the technology we agree to analyze. The assessment services provided by Cyberscope are subject to dependencies and are under continuing development. You agree that your access and/or use including but not limited to any services reports and materials will be at your sole risk on an as-is where-is and as-available basis Cryptographic tokens are emergent technologies and carry with them high levels of technical risk and uncertainty. The assessment reports could include false positives false negatives and other unpredictable results. The services may access and depend upon multiple layers of third parties.

About Cyberscope

Cyberscope is a blockchain cybersecurity company that was founded with the vision to make web3.0 a safer place for investors and developers. Since its launch, it has worked with thousands of projects and is estimated to have secured tens of millions of investors' funds.

Cyberscope is one of the leading smart contract audit firms in the crypto space and has built a high-profile network of clients and partners.



The Cyberscope team

https://www.cyberscope.io

Cyberscope

Audit Report

Pepeki

May 2023

SHA256 c56f25e0c7269eabe251959df9c675a295a0111a20b92b7a82ac41578504e332

Audited by © cyberscope

Table of Contents

Table of Contents 1
Review 3
Audit Updates 3
Source Files 3
Findings Breakdown 4
Analysis 5
Diagnostics 6
L02 - State Variables could be Declared Constant 7
Description 7
Recommendation 7
L04 - Conformance to Solidity Naming Conventions 8
Description 8
Recommendation 8
L05 - Unused State Variable 10
Description 10
Recommendation 10
L14 - Uninitialized Variables in Local Scope 11
Description 11
Recommendation 11
L16 - Validate Variable Setters 12
Description 12
Recommendation 12
L20 - Succeeded Transfer Check 13
Description 13
Recommendation 13
Functions Analysis 14
Inheritance Graph 18
Flow Graph 19
Summary 20
Disclaimer 21
About Cyberscope 22

Review

Testing Deploy	https://testnet.snowtrace.io/address/0x18f58dd7a7d32b007fe02f019617e5f339e092b8


Audit Updates

Initial Audit	11 May 2023 https://github.com/cyberscope-io/audits/blob/main/1-pepeki/v1/audit.pdf
Corrected Phase 2	12 May 2023 https://github.com/cyberscope-io/audits/blob/main/1-pepeki/v2/audit.pdf
Corrected Phase 3	22 May 2023

Source Files

Filename	SHA256
5-21-2023_Pepeki_ETH.sol	c56f25e0c7269eabe251959df9c675a295a0111a20b92b7a82ac41578504e332

Findings Breakdown



Critical	0
Medium	0
Minor / Informative	6

Severity	Unresolved	Acknowledged	Resolved	Other
Critical	0	0	0	0
Medium	0	0	0	0
Minor / Informative	6	0	0	0

Analysis

Critical Medium Minor / Informative Pass

Severity	Code	Description	Status
	ST	Stops Transactions	Passed
	OCTD	Transfers Contract's Tokens	Passed
	OTUT	Transfers User's Tokens	Passed
	ELFM	Exceeds Fees Limit	Passed
	ULTW	Transfers Liquidity to Team Wallet	Passed
	MT	Mints Tokens	Passed
	BT	Burns Tokens	Passed
	BC	Blacklists Addresses	Passed

Diagnostics

Critical Medium Minor / Informative

Severity	Code	Description	Status
●	L02	State Variables could be Declared Constant	Unresolved
●	L04	Conformance to Solidity Naming Conventions	Unresolved
●	L05	Unused State Variable	Unresolved
●	L14	Uninitialized Variables in Local Scope	Unresolved
●	L16	Validate Variable Setters	Unresolved
●	L20	Succeeded Transfer Check	Unresolved

L02 - State Variables could be Declared Constant

Criticality	Minor / Informative
Location	5-21-2023_Pepeki_ETH.sol#L103,116
Status	Unresolved

Description

State variables can be declared as constant using the constant keyword. This means that the value of the state variable cannot be changed after it has been set. Additionally, the constant variables decrease gas consumption of the corresponding transaction.

```
uint256 private timeSinceLastPair = 0
bool public taxesAreLocked
```

Recommendation

Constant state variables can be useful when the contract wants to ensure that the value of a state variable cannot be changed by any function in the contract. This can be useful for storing values that are important to the contract's behavior, such as the contract's address or the maximum number of times a certain function can be called. The team is advised to add the constant keyword to state variables that never change.

L04 - Conformance to Solidity Naming Conventions

Criticality	Minor / Informative
Location	5-21-2023_Pepeki_ETH.sol#L33,110,111,112,113,114,122
Status	Unresolved

Description

The Solidity style guide is a set of guidelines for writing clean and consistent Solidity code. Adhering to a style guide can help improve the readability and maintainability of the Solidity code, making it easier for others to understand and work with.

The followings are a few key points from the Solidity style guide:

1. Use camelCase for function and variable names, with the first letter in lowercase (e.g., myVariable, updateCounter).
2. Use PascalCase for contract, struct, and enum names, with the first letter in uppercase (e.g., MyContract, UserStruct, ErrorEnum).
3. Use uppercase for constant variables and enums (e.g., MAX_VALUE, ERROR_CODE).
4. Use indentation to improve readability and structure.
5. Use spaces between operators and after commas.
6. Use comments to explain the purpose and behavior of the code.
7. Keep lines short (around 120 characters) to improve readability.

```
function WETH() external pure returns (address);
uint256 constant private startingSupply = 130_000
string constant private _name = "Pepeki"
string constant private _symbol = "PEPEKI"
uint8 constant private _decimals = 9
uint256 constant private _tTotal = startingSupply * 10**_decimals
bool public _hasLiqBeenAdded = false
```

Recommendation

By following the Solidity naming convention guidelines, the codebase increased the readability, maintainability, and makes it easier to work with.

Find more information on the Solidity documentation
https://docs.soliditylang.org/en/v0.8.17/style-guide.html#naming-convention.

L05 - Unused State Variable

Criticality	Minor / Informative
Location	5-21-2023_Pepeki_ETH.sol#L103,107
Status	Unresolved

Description

An unused state variable is a state variable that is declared in the contract, but is never used in any of the contract's functions. This can happen if the state variable was originally intended to be used, but was later removed or never used.

Unused state variables can create clutter in the contract and make it more difficult to understand and maintain. They can also increase the size of the contract and the cost of deploying and interacting with it.

```
uint256 private timeSinceLastPair = 0
mapping (address => bool) private _isExcludedFromLimits
```

Recommendation

To avoid creating unused state variables, it's important to carefully consider the state variables that are needed for the contract's functionality, and to remove any that are no longer needed. This can help improve the clarity and efficiency of the contract.

L14 - Uninitialized Variables in Local Scope

Criticality	Minor / Informative
Location	5-21-2023_Pepeki_ETH.sol#L237
Status	Unresolved

Description

Using an uninitialized local variable can lead to unpredictable behavior and potentially cause errors in the contract. It's important to always initialize local variables with appropriate values before using them.

```
address constructorLP
address router
```

Recommendation

By initializing local variables before using them, the contract ensures that the functions behave as expected and avoid potential issues.

L16 - Validate Variable Setters

Criticality	Minor / Informative
Location	5-21-2023_Pepeki_ETH.sol#L178
Status	Unresolved

Description

The contract performs operations on variables that have been configured on user-supplied input. These variables are missing of proper check for the case where a value is zero. This can lead to problems when the contract is executed, as certain actions may not be properly handled when the value is zero.

```
operator = newOperator
```

Recommendation

By adding the proper check, the contract will not allow the variables to be configured with zero value. This will ensure that the contract can handle all possible input values and avoid unexpected behavior or errors. Hence, it can help to prevent the contract from being exploited or operating unexpectedly.

L20 - Succeeded Transfer Check

Criticality	Minor / Informative
Location	5-21-2023_Pepeki_ETH.sol#L342
Status	Unresolved

Description

According to the ERC20 specification, the transfer methods should be checked if the result is successful. Otherwise, the contract may wrongly assume that the transfer has been established.

```
TOKEN.transfer(_owner, TOKEN.balanceOf(address(this)))
```

Recommendation

The contract should check if the result of the transfer methods is successful. The team is advised to check the SafeERC20 library from the Openzeppelin library.

Functions Analysis


Contract	Type	Bases		
	Function Name	**Visibility**	**Mutability**	**Modifiers**
IERC20	Interface			
	totalSupply	External		-
	decimals	External		-
	symbol	External		-
	name	External		-
	getOwner	External		-
	balanceOf	External		-
	transfer	External	✓	-
	allowance	External		-
	approve	External	✓	-
	transferFrom	External	✓	-
IFactoryV2	Interface			
	getPair	External		-
	createPair	External	✓	-
IV2Pair	Interface			
	factory	External		-

	getReserves	External		-
	sync	External	✓	-
IRouter01	Interface			
	factory	External		-
	WETH	External		-
	addLiquidityETH	External	Payable	-
	addLiquidity	External	✓	-
	swapExactETHForTokens	External	Payable	-
	getAmountsOut	External		-
	getAmountsIn	External		-
IRouter02	Interface	IRouter01		
	swapExactTokensForETHSupportingFeeOnTransferTokens	External	✓	-
	swapExactETHForTokensSupportingFeeOnTransferTokens	External	Payable	-
	swapExactTokensForTokensSupportingFeeOnTransferTokens	External	✓	-
	swapExactTokensForTokens	External	✓	-
Protections	Interface			
	checkUser	External	✓	-
	setLaunch	External	✓	-
	getConfig	External	✓	-
	setLpPair	External	✓	-


	setProtections	External	✓	-
	removeSniper	External	✓	-
AaTokenContract	Implementation	IERC20		
		Public	Payable	-
		External	Payable	-
	transferOwner	External	✓	onlyOwner
	renounceOwnership	External	✓	onlyOwner
	setOperator	Public	✓	-
	renounceOriginalDeployer	External	✓	-
	totalSupply	External		-
	decimals	External		-
	symbol	External		-
	name	External		-
	getOwner	External		-
	allowance	External		-
	balanceOf	Public		-
	transfer	Public	✓	-
	approve	External	✓	-
	_approve	Internal	✓	
	approveContractContingency	External	✓	onlyOwner
	transferFrom	External	✓	-
	setInitializer	External	✓	onlyOwner

	isExcludedFromProtection	External		-
	setExcludedFromProtection	External	✓	onlyOwner
	getCirculatingSupply	Public		-
	removeSniper	External	✓	onlyOwner
	excludePresaleAddresses	External	✓	onlyOwner
	_hasLimits	Internal		
	_transfer	Internal	✓	
	_checkLiquidityAdd	Internal	✓	
	enableTrading	Public	✓	onlyOwner
	sweepBalance	External	✓	onlyOwner
	sweepExternalTokens	External	✓	onlyOwner
	multiSendTokens	External	✓	onlyOwner
	finalizeTransfer	Internal	✓	

Inheritance Graph

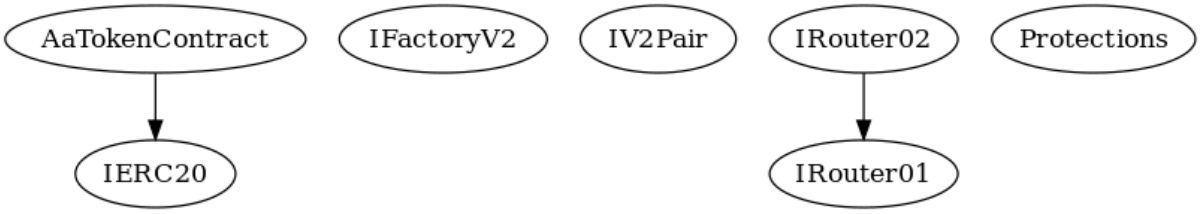

Flow Graph

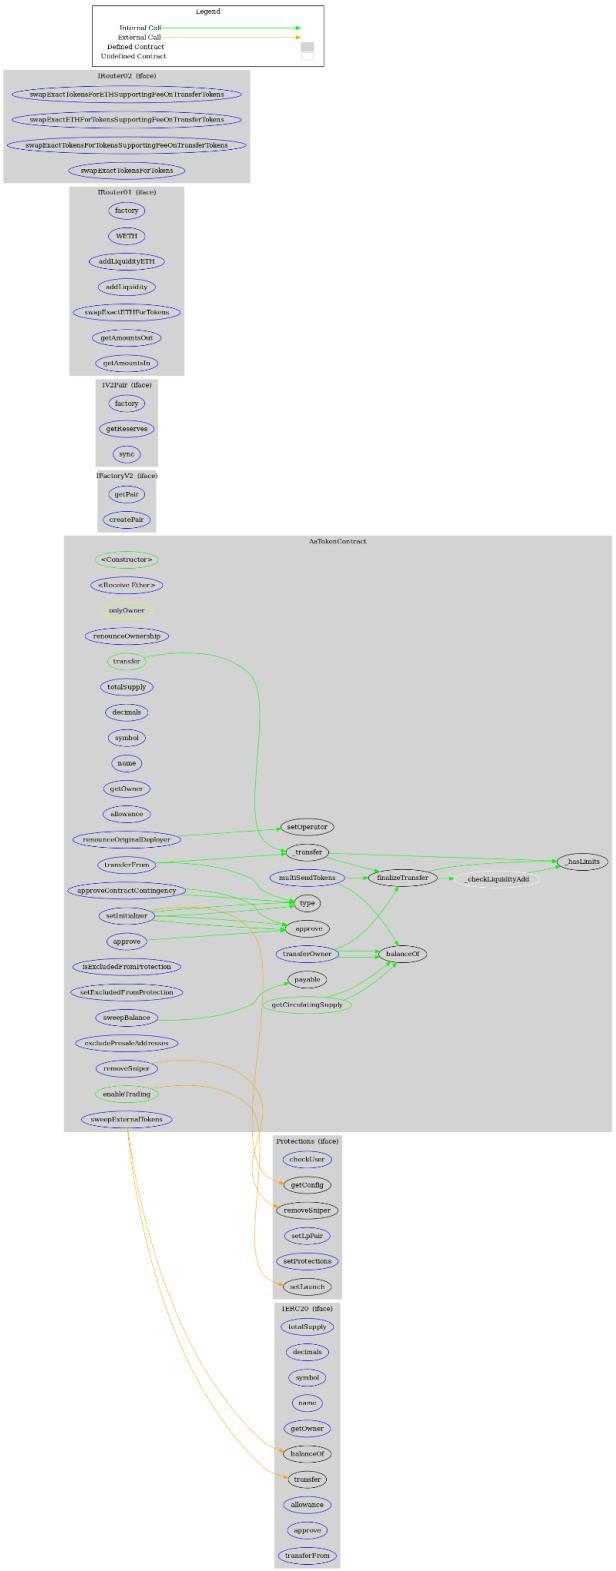
Legend
Internal Call
External Call
Defined Contract
Undefined Contract
IRouter02 (iface)
swapExactTokensForETHSupportingFeeOnTransferTokens
swapExactETHForTokensSupportingFeeOnTransferTokens
swapExactTokensForTokensSupportingFeeOnTransferTokens
swapExactTokensForTokens
IRouter01 (iface)
factory
WETH
addLiquidityETH
addLiquidity
swapExactETHForTokens
getAmountsOut
getAmountsIn
IV2Pair (iface)
factory
getReserves
sync
IFactoryV2 (iface)
getPair
createPair
AaTokenContract
<Constructor>
<Receive Ether>
onlyOwner
renounceOwnership
transfer
totalSupply
decimals
symbol
name
getOwner
allowance
renounceOriginalDeployer
transferFrom
approveContractContingency
setInitializer
approve
isExcludedFromProtection
setExcludedFromProtection
sweepBalance
excludePresaleAddresses
removeSniper
enableTrading
sweepExternalTokens
setOperator
_transfer
multiSendTokens
finalizeTransfer
_checkLiquidityAdd
hasLimits
type
_approve
transferOwner
balanceOf
payable
getCirculatingSupply
Protections (iface)
checkUser
getConfig
removeSniper
setLpPair
setProtections
setLaunch
IERC20 (iface)
totalSupply
decimals
symbol
name
getOwner
balanceOf
transfer
allowance
approve
transferFrom

Summary

Pepeki contract implements a token mechanism. This audit investigates security issues, business logic concerns, and potential improvements. Pepeki is an interesting project that has a friendly and growing community. The Smart Contract analysis reported no compiler errors or critical issues. The contract Owner can access some admin functions that can not be used in a malicious way to disturb the users' transactions.

Disclaimer

The information provided in this report does not constitute investment, financial or trading advice and you should not treat any of the document's content as such. This report may not be transmitted, disclosed, referred to or relied upon by any person for any purposes nor may copies be delivered to any other person other than the Company without Cyberscope's prior written consent. This report is not nor should be considered an "endorsement" or "disapproval" of any particular project or team. This report is not nor should be regarded as an indication of the economics or value of any "product" or "asset" created by any team or project that contracts Cyberscope to perform a security assessment. This document does not provide any warranty or guarantee regarding the absolute bug-free nature of the technology analyzed, nor do they provide any indication of the technologies proprietors' business, business model or legal compliance. This report should not be used in any way to make decisions around investment or involvement with any particular project. This report represents an extensive assessment process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology.

Blockchain technology and cryptographic assets present a high level of ongoing risk Cyberscope's position is that each company and individual are responsible for their own due diligence and continuous security Cyberscope's goal is to help reduce the attack vectors and the high level of variance associated with utilizing new and consistently changing technologies and in no way claims any guarantee of security or functionality of the technology we agree to analyze. The assessment services provided by Cyberscope are subject to dependencies and are under continuing development. You agree that your access and/or use including but not limited to any services reports and materials will be at your sole risk on an as-is where-is and as-available basis Cryptographic tokens are emergent technologies and carry with them high levels of technical risk and uncertainty. The assessment reports could include false positives false negatives and other unpredictable results. The services may access and depend upon multiple layers of third parties.

About Cyberscope

Cyberscope is a blockchain cybersecurity company that was founded with the vision to make web3.0 a safer place for investors and developers. Since its launch, it has worked with thousands of projects and is estimated to have secured tens of millions of investors' funds.

Cyberscope is one of the leading smart contract audit firms in the crypto space and has built a high-profile network of clients and partners.



The Cyberscope team

https://www.cyberscope.io