



Cyberscope

Audit Report

Mobsterblox

April 2023

Network BSC

Address 0xAC3b15E41e4F284536305c55bB4163f7FAa6F2B9

Audited by © cyberscope

Table of Contents

Table of Contents	1
Review	2
Audit Updates	2
Source Files	2
Findings Breakdown	3
Analysis	4
ST - Stops Transactions	5
Description	5
Recommendation	5
ELFM - Exceeds Fees Limit	6
Description	6
Recommendation	7
Diagnostics	8
PVC - Price Volatility Concern	9
Description	9
Recommendation	9
RSML - Redundant SafeMath Library	10
Description	10
Recommendation	10
IDI - Immutable Declaration Improvement	11
Description	11
Recommendation	11
L02 - State Variables could be Declared Constant	12
Description	12
Recommendation	12
L04 - Conformance to Solidity Naming Conventions	13
Description	13
Recommendation	14
L07 - Missing Events Arithmetic	15
Description	15
Recommendation	15
L09 - Dead Code Elimination	16
Description	16
Recommendation	17
L13 - Divide before Multiply Operation	18
Description	18
Recommendation	18
L16 - Validate Variable Setters	19
Description	19

Recommendation	19
L17 - Usage of Solidity Assembly	20
Description	20
Recommendation	20
L19 - Stable Compiler Version	21
Description	21
Recommendation	21
Functions Analysis	22
Inheritance Graph	30
Flow Graph	31
Summary	32
Disclaimer	33
About Cyberscope	34

Review

Contract Name	Mobsterblox
Compiler Version	v0.8.17+commit.8df45f5f
Optimization	200 runs
Explorer	https://bscscan.com/address/0xac3b15e41e4f284536305c55bb4163f7faa6f2b9
Address	0xac3b15e41e4f284536305c55bb4163f7faa6f2b9
Network	BSC
Symbol	MOBLOX
Decimals	9
Total Supply	1,000,000,000,000,000


Audit Updates

Initial Audit	11 Apr 2023 https://github.com/cyberscope-io/audits/blob/main/moblox/v1/audit.pdf
Corrected Phase 2	13 Apr 2023

Source Files

Filename	SHA256
Mobsterblox.sol	e2d13cc9c8d3c9270d8638e546b2d975e34e79fa65f82e6cfd1e77697b050bd8

Findings Breakdown



Critical	1
Medium	1
Minor / Informative	11

Severity	Unresolved	Acknowledged	Resolved	Other
Critical	1	0	0	0
Medium	1	0	0	0
Minor / Informative	11	0	0	0

Analysis

● Critical ● Medium ● Minor / Informative ● Pass

Severity	Code	Description	Status
●	ST	Stops Transactions	Unresolved
●	OCTD	Transfers Contract's Tokens	Passed
●	OTUT	Transfers User's Tokens	Passed
●	ELFM	Exceeds Fees Limit	Unresolved
●	ULTW	Transfers Liquidity to Team Wallet	Passed
●	MT	Mints Tokens	Passed
●	BT	Burns Tokens	Passed
●	BC	Blacklists Addresses	Passed

ST - Stops Transactions

Criticality	Medium
Location	Mobsterblox.sol#L790
Status	Unresolved

Description

The contract owner has the authority to stop the transactions for all users excluding the owner. The owner may take advantage of it by setting the `_maxTxAmount` to zero.

```
if(from != owner() && to != owner())  
    require(amount <= _maxTxAmount, "Transfer amount exceeds the  
maxTxAmount.");
```

Recommendation

The contract could embody a check for not allowing setting the `_maxTxAmount` less than a reasonable amount. A suggested implementation could check that the maximum amount should be more than a fixed percentage of the total supply. The team should carefully manage the private keys of the owner's account. We strongly recommend a powerful security mechanism that will prevent a single user from accessing the contract admin functions. Some suggestions are:

- Introduce a time-locker mechanism with a reasonable delay.
- Introduce a multi-sign wallet so that many addresses will confirm the action.
- Introduce a governance model where users will vote about the actions.
- Renouncing the ownership will eliminate the threats but it is non-reversible.

ELFM - Exceeds Fees Limit

Criticality	Critical
Location	Mobsterblox.sol#L644,648,652
Status	Unresolved

Description

The contract owner has the authority to increase over the allowed limit of 25%. The owner may take advantage of it by calling the following functions with a high percentage value:

- `setTaxFeePercent`
- `setDevFeePercent`
- `setLiquidityFeePercent`

```
function setTaxFeePercent(uint256 taxFee) external onlyOwner() {
    _taxFee = taxFee;
}

function setDevFeePercent(uint256 devFee) external onlyOwner() {
    _devFee = devFee;
}

function setLiquidityFeePercent(uint256 liquidityFee) external onlyOwner()
{
    _liquidityFee = liquidityFee;
}
```

Recommendation

The contract could embody a check for the maximum acceptable value. The team should carefully manage the private keys of the owner's account. We strongly recommend a powerful security mechanism that will prevent a single user from accessing the contract admin functions. Some suggestions are:

- Introduce a time-locker mechanism with a reasonable delay.
- Introduce a multi-sign wallet so that many addresses will confirm the action.
- Introduce a governance model where users will vote about the actions.
- Renouncing the ownership will eliminate the threats but it is non-reversible.

Diagnostics

● Critical ● Medium ● Minor / Informative

Severity	Code	Description	Status
●	PVC	Price Volatility Concern	Unresolved
●	RSML	Redundant SafeMath Library	Unresolved
●	IDI	Immutable Declaration Improvement	Unresolved
●	L02	State Variables could be Declared Constant	Unresolved
●	L04	Conformance to Solidity Naming Conventions	Unresolved
●	L07	Missing Events Arithmetic	Unresolved
●	L09	Dead Code Elimination	Unresolved
●	L13	Divide before Multiply Operation	Unresolved
●	L16	Validate Variable Setters	Unresolved
●	L17	Usage of Solidity Assembly	Unresolved
●	L19	Stable Compiler Version	Unresolved

PVC - Price Volatility Concern

Criticality	Minor / Informative
Location	Mobsterblox.sol#L914
Status	Unresolved

Description

The contract accumulates tokens from the taxes to swap them for ETH. The variable `numTokensSellToAddToLiquidity` sets a threshold where the contract will trigger the swap functionality. If the variable is set to a big number, then the contract will swap a huge amount of tokens for ETH.

It is important to note that the price of the token representing it, can be highly volatile. This means that the value of a price volatility swap involving Ether could fluctuate significantly at the triggered point, potentially leading to significant price volatility for the parties involved.

```
function setNumTokensSellToAddToLiquidity(uint256 amountToUpdate) external  
onlyOwner {  
    numTokensSellToAddToLiquidity = amountToUpdate;  
}
```

Recommendation

The contract could ensure that it will not sell more than a reasonable amount of tokens in a single transaction. A suggested implementation could check that the maximum amount should be less than a fixed percentage of the total supply. Hence, the contract will guarantee that it cannot accumulate a huge amount of tokens in order to sell them.

RSML - Redundant SafeMath Library

Criticality	Minor / Informative
Location	Mobsterblox.sol
Status	Unresolved

Description

SafeMath is a popular Solidity library that provides a set of functions for performing common arithmetic operations in a way that is resistant to integer overflows and underflows.

Starting with Solidity versions that are greater than or equal to 0.8.0, the arithmetic operations revert to underflow and overflow. As a result, the native functionality of the Solidity operations replaces the SafeMath library. Hence, the usage of the SafeMath library adds complexity, and overhead and increases gas consumption unnecessarily.

```
library SafeMath {...}
```

Recommendation

The team is advised to remove the SafeMath library. Since the version of the contract is greater than `0.8.0` then the pure Solidity arithmetic operations produce the same result.

If the previous functionality is required, then the contract could exploit the `unchecked { ... }` statement.

Read more about the breaking change at

<https://docs.soliditylang.org/en/v0.8.16/080-breaking-changes.html#solidity-v0-8-0-breaking-changes>.

IDI - Immutable Declaration Improvement

Criticality	Minor / Informative
Location	Mobsterblox.sol#L480,481,482,483
Status	Unresolved

Description

The contract is using variables that initialize them only in the constructor. The other functions are not mutating the variables. These variables are not defined as `immutable`.

```
_name  
_symbol  
_decimals  
_tTotal
```

Recommendation

By declaring a variable as immutable, the Solidity compiler is able to make certain optimizations. This can reduce the amount of storage and computation required by the contract, and make it more gas-efficient.

L02 - State Variables could be Declared Constant

Criticality	Minor / Informative
Location	Mobsterblox.sol#L469
Status	Unresolved

Description

State variables can be declared as constant using the constant keyword. This means that the value of the state variable cannot be changed after it has been set. Additionally, the constant variables decrease gas consumption of the corresponding transaction.

```
uint256 public Optimization = 5031200463257868702588264636405871
```

Recommendation

Constant state variables can be useful when the contract wants to ensure that the value of a state variable cannot be changed by any function in the contract. This can be useful for storing values that are important to the contract's behavior, such as the contract's address or the maximum number of times a certain function can be called. The team is advised to add the constant keyword to state variables that never change.

L04 - Conformance to Solidity Naming Conventions

Criticality	Minor / Informative
Location	Mobsterblox.sol#L194,196,267,268,282,300,442,450,452,454,460,469,660,665,734,740,746
Status	Unresolved

Description

The Solidity style guide is a set of guidelines for writing clean and consistent Solidity code. Adhering to a style guide can help improve the readability and maintainability of the Solidity code, making it easier for others to understand and work with.

The followings are a few key points from the Solidity style guide:

1. Use camelCase for function and variable names, with the first letter in lowercase (e.g., myVariable, updateCounter).
2. Use PascalCase for contract, struct, and enum names, with the first letter in uppercase (e.g., MyContract, UserStruct, ErrorEnum).
3. Use uppercase for constant variables and enums (e.g., MAX_VALUE, ERROR_CODE).
4. Use indentation to improve readability and structure.
5. Use spaces between operators and after commas.
6. Use comments to explain the purpose and behavior of the code.
7. Keep lines short (around 120 characters) to improve readability.

```
address public _owner
uint256 public _lockTime
function DOMAIN_SEPARATOR() external view returns (bytes32);
function PERMIT_TYPEHASH() external pure returns (bytes32);
function MINIMUM_LIQUIDITY() external pure returns (uint);
function WETH() external pure returns (address);
address public _devWalletAddress
uint256 public _taxFee
uint256 public _devFee
uint256 public _liquidityFee
uint256 public _maxTxAmount
uint256 public Optimization = 5031200463257868702588264636405871
address _addr
bool _enabled

...
```

Recommendation

By following the Solidity naming convention guidelines, the codebase increased the readability, maintainability, and makes it easier to work with.

Find more information on the Solidity documentation

<https://docs.soliditylang.org/en/v0.8.17/style-guide.html#naming-convention>.

L07 - Missing Events Arithmetic

Criticality	Minor / Informative
Location	Mobsterblox.sol#L645,649,653,657,915
Status	Unresolved

Description

Events are a way to record and log information about changes or actions that occur within a contract. They are often used to notify external parties or clients about events that have occurred within the contract, such as the transfer of tokens or the completion of a task.

It's important to carefully design and implement the events in a contract, and to ensure that all required events are included. It's also a good idea to test the contract to ensure that all events are being properly triggered and logged.

```
_taxFee = taxFee
_devFee = devFee
_liquidityFee = liquidityFee
_maxTxAmount = maxTxPercent * 10 ** _decimals
numTokensSellToAddToLiquidity = amountToUpdate
```

Recommendation

By including all required events in the contract and thoroughly testing the contract's functionality, the contract ensures that it performs as intended and does not have any missing events that could cause issues with its arithmetic.

L09 - Dead Code Elimination

Criticality	Minor / Informative
Location	Mobsterblox.sol#L123,129,135,139,143,147,154,158,165,169,175
Status	Unresolved

Description

In Solidity, dead code is code that is written in the contract, but is never executed or reached during normal contract execution. Dead code can occur for a variety of reasons, such as:

- Conditional statements that are always false.
- Functions that are never called.
- Unreachable code (e.g., code that follows a return statement).

Dead code can make a contract more difficult to understand and maintain, and can also increase the size of the contract and the cost of deploying and interacting with it.

```
function isContract(address account) internal view returns (bool) {
    uint256 size;
    assembly { size := extcodesize(account) }
    return size > 0;
}

...

(bool success, ) = recipient.call{ value: amount }("");
require(success, "Address: unable to send value, recipient may
have reverted");
}

function functionCall(address target, bytes memory data) internal returns
(bytes memory) {
    return functionCall(target, data, "Address: low-level call
failed");
}

...
```

Recommendation

To avoid creating dead code, it's important to carefully consider the logic and flow of the contract and to remove any code that is not needed or that is never executed. This can help improve the clarity and efficiency of the contract.

L13 - Divide before Multiply Operation

Criticality	Minor / Informative
Location	Mobsterblox.sol#L492,493
Status	Unresolved

Description

It is important to be aware of the order of operations when performing arithmetic calculations. This is especially important when working with large numbers, as the order of operations can affect the final result of the calculation. Performing divisions before multiplications may cause a loss of precision.

```
_maxTxAmount = (_tTotal * 5 / 1000) * 10 ** _decimals
```

Recommendation

To avoid this issue, it is recommended to carefully consider the order of operations when performing arithmetic calculations in Solidity. It's generally a good idea to use parentheses to specify the order of operations. The basic rule is that the multiplications should be prior to the divisions.

L16 - Validate Variable Setters

Criticality	Minor / Informative
Location	Mobsterblox.sol#L494,510,511,661
Status	Unresolved

Description

The contract performs operations on variables that have been configured on user-supplied input. These variables are missing of proper check for the case where a value is zero. This can lead to problems when the contract is executed, as certain actions may not be properly handled when the value is zero.

```
_devWalletAddress = feeaddress  
_owner = tokenOwner  
payable(service).transfer(msg.value)  
_devWalletAddress = _addr
```

Recommendation

By adding the proper check, the contract will not allow the variables to be configured with zero value. This will ensure that the contract can handle all possible input values and avoid unexpected behavior or errors. Hence, it can help to prevent the contract from being exploited or operating unexpectedly.

L17 - Usage of Solidity Assembly

Criticality	Minor / Informative
Location	Mobsterblox.sol#L125,180
Status	Unresolved

Description

Using assembly can be useful for optimizing code, but it can also be error-prone. It's important to carefully test and debug assembly code to ensure that it is correct and does not contain any errors.

Some common types of errors that can occur when using assembly in Solidity include Syntax, Type, Out-of-bounds, Stack, and Revert.

```
assembly { size := extcodesize(account) }

assembly {
    let returndata_size := mload(returndata)
    revert(add(32, returndata), returndata_size)
}
```

Recommendation

It is recommended to use assembly sparingly and only when necessary, as it can be difficult to read and understand compared to Solidity code.

L19 - Stable Compiler Version

Criticality	Minor / Informative
Location	Mobsterblox.sol#L3
Status	Unresolved

Description

The `^` symbol indicates that any version of Solidity that is compatible with the specified version (i.e., any version that is a higher minor or patch version) can be used to compile the contract. The version lock is a mechanism that allows the author to specify a minimum version of the Solidity compiler that must be used to compile the contract code. This is useful because it ensures that the contract will be compiled using a version of the compiler that is known to be compatible with the code.

```
pragma solidity ^0.8.4;
```

Recommendation

The team is advised to lock the pragma to ensure the stability of the codebase. The locked pragma version ensures that the contract will not be deployed with an unexpected version. An unexpected version may produce vulnerabilities and undiscovered bugs. The compiler should be configured to the lowest version that provides all the required functionality for the codebase. As a result, the project will be compiled in a well-tested LTS (Long Term Support) environment.

Functions Analysis

Contract	Type	Bases		
	Function Name	Visibility	Mutability	Modifiers
IERC20	Interface			
	totalSupply	External		-
	balanceOf	External		-
	transfer	External	✓	-
	allowance	External		-
	approve	External	✓	-
	transferFrom	External	✓	-
SafeMath	Library			
	tryAdd	Internal		
	trySub	Internal		
	tryMul	Internal		
	tryDiv	Internal		
	tryMod	Internal		
	add	Internal		
	sub	Internal		
	mul	Internal		
	div	Internal		

	mod	Internal		
	sub	Internal		
	div	Internal		
	mod	Internal		
Context	Implementation			
	_msgSender	Internal		
	_msgData	Internal		
Address	Library			
	isContract	Internal		
	sendValue	Internal	✓	
	functionCall	Internal	✓	
	functionCall	Internal	✓	
	functionCallWithValue	Internal	✓	
	functionCallWithValue	Internal	✓	
	functionStaticCall	Internal		
	functionStaticCall	Internal		
	functionDelegateCall	Internal	✓	
	functionDelegateCall	Internal	✓	
	_verifyCallResult	Private		
Ownable	Implementation	Context		

		Public	✓	-
	owner	Public		-
	renounceOwnership	Public	✓	onlyOwner
	transferOwnership	Public	✓	onlyOwner
	lock	Public	✓	onlyOwner
	unlock	Public	✓	-
IUniswapV2Factory	Interface			
	feeTo	External		-
	feeToSetter	External		-
	getPair	External		-
	allPairs	External		-
	allPairsLength	External		-
	createPair	External	✓	-
	setFeeTo	External	✓	-
	setFeeToSetter	External	✓	-
IUniswapV2Pair	Interface			
	name	External		-
	symbol	External		-
	decimals	External		-
	totalSupply	External		-
	balanceOf	External		-

	allowance	External		-
	approve	External	✓	-
	transfer	External	✓	-
	transferFrom	External	✓	-
	DOMAIN_SEPARATOR	External		-
	PERMIT_TYPEHASH	External		-
	nonces	External		-
	permit	External	✓	-
	MINIMUM_LIQUIDITY	External		-
	factory	External		-
	token0	External		-
	token1	External		-
	getReserves	External		-
	price0CumulativeLast	External		-
	price1CumulativeLast	External		-
	kLast	External		-
	mint	External	✓	-
	burn	External	✓	-
	swap	External	✓	-
	skim	External	✓	-
	sync	External	✓	-
	initialize	External	✓	-

IUniswapV2Router01	Interface			
	factory	External		-
	WETH	External		-
	addLiquidity	External	✓	-
	addLiquidityETH	External	Payable	-
	removeLiquidity	External	✓	-
	removeLiquidityETH	External	✓	-
	removeLiquidityWithPermit	External	✓	-
	removeLiquidityETHWithPermit	External	✓	-
	swapExactTokensForTokens	External	✓	-
	swapTokensForExactTokens	External	✓	-
	swapExactETHForTokens	External	Payable	-
	swapTokensForExactETH	External	✓	-
	swapExactTokensForETH	External	✓	-
	swapETHForExactTokens	External	Payable	-
	quote	External		-
	getAmountOut	External		-
	getAmountIn	External		-
	getAmountsOut	External		-
	getAmountsIn	External		-
IUniswapV2Router02	Interface	IUniswapV2Router01		
	removeLiquidityETHSupportingFeeOnTransferTokens	External	✓	-

	removeLiquidityETHWithPermitSupportingFeeOnTransferTokens	External	✓	-
	swapExactTokensForTokensSupportingFeeOnTransferTokens	External	✓	-
	swapExactETHForTokensSupportingFeeOnTransferTokens	External	Payable	-
	swapExactTokensForETHSupportingFeeOnTransferTokens	External	✓	-
Mobsterblox	Implementation	Context, IERC20, Ownable		
		Public	Payable	-
	name	Public		-
	symbol	Public		-
	decimals	Public		-
	totalSupply	Public		-
	balanceOf	Public		-
	transfer	Public	✓	-
	allowance	Public		-
	approve	Public	✓	-
	transferFrom	Public	✓	-
	increaseAllowance	Public	✓	-
	decreaseAllowance	Public	✓	-
	isExcludedFromReward	Public		-
	totalFees	Public		-
	deliver	Public	✓	-
	reflectionFromToken	Public		-


	tokenFromReflection	Public		-
	excludeFromReward	Public	✓	onlyOwner
	includeInReward	External	✓	onlyOwner
	_transferBothExcluded	Private	✓	
	excludeFromFee	Public	✓	onlyOwner
	includeInFee	Public	✓	onlyOwner
	setTaxFeePercent	External	✓	onlyOwner
	setDevFeePercent	External	✓	onlyOwner
	setLiquidityFeePercent	External	✓	onlyOwner
	setMaxTxPercent	Public	✓	onlyOwner
	setDevWalletAddress	Public	✓	onlyOwner
	setSwapAndLiquifyEnabled	Public	✓	onlyOwner
		External	Payable	-
	_reflectFee	Private	✓	
	_getValues	Private		
	_getTValues	Private		
	_getRValues	Private		
	_getRate	Private		
	_getCurrentSupply	Private		
	_takeLiquidity	Private	✓	
	_takeDev	Private	✓	
	calculateTaxFee	Private		
	calculateDevFee	Private		

	calculateLiquidityFee	Private		
	removeAllFee	Private	✓	
	restoreAllFee	Private	✓	
	isExcludedFromFee	Public		-
	_approve	Private	✓	
	_transfer	Private	✓	
	swapAndLiquify	Private	✓	lockTheSwap
	swapTokensForEth	Private	✓	
	addLiquidity	Private	✓	
	_tokenTransfer	Private	✓	
	_transferStandard	Private	✓	
	_transferToExcluded	Private	✓	
	_transferFromExcluded	Private	✓	
	setRouterAddress	External	✓	onlyOwner
	setNumTokensSellToAddToLiquidity	External	✓	onlyOwner

Inheritance Graph



Flow Graph

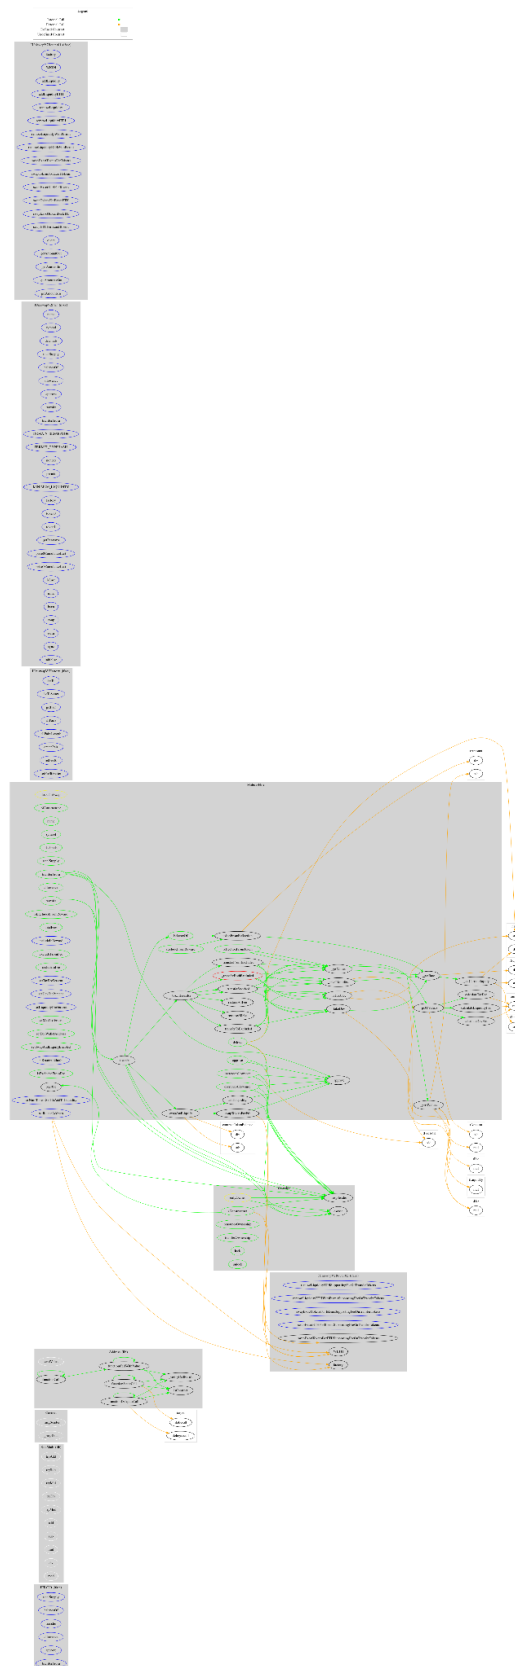

Summary

Mobsterblox contract implements a token mechanism. This audit investigates security issues, business logic concerns, and potential improvements. There are some functions that can be abused by the owner like stopping transactions and manipulating the fees. A multi-wallet signing pattern will provide security against potential hacks. Temporarily locking the contract or renouncing ownership will eliminate all the contract threats.

Disclaimer

The information provided in this report does not constitute investment, financial or trading advice and you should not treat any of the document's content as such. This report may not be transmitted, disclosed, referred to or relied upon by any person for any purposes nor may copies be delivered to any other person other than the Company without Cyberscope's prior written consent. This report is not nor should be considered an "endorsement" or "disapproval" of any particular project or team. This report is not nor should be regarded as an indication of the economics or value of any "product" or "asset" created by any team or project that contracts Cyberscope to perform a security assessment. This document does not provide any warranty or guarantee regarding the absolute bug-free nature of the technology analyzed, nor do they provide any indication of the technologies proprietors' business, business model or legal compliance. This report should not be used in any way to make decisions around investment or involvement with any particular project. This report represents an extensive assessment process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology.

Blockchain technology and cryptographic assets present a high level of ongoing risk. Cyberscope's position is that each company and individual are responsible for their own due diligence and continuous security. Cyberscope's goal is to help reduce the attack vectors and the high level of variance associated with utilizing new and consistently changing technologies and in no way claims any guarantee of security or functionality of the technology we agree to analyze. The assessment services provided by Cyberscope are subject to dependencies and are under continuing development. You agree that your access and/or use including but not limited to any services reports and materials will be at your sole risk on an as-is where-is and as-available basis. Cryptographic tokens are emergent technologies and carry with them high levels of technical risk and uncertainty. The assessment reports could include false positives, false negatives and other unpredictable results. The services may access and depend upon multiple layers of third parties.

About Cyberscope

Cyberscope is a blockchain cybersecurity company that was founded with the vision to make web3.0 a safer place for investors and developers. Since its launch, it has worked with thousands of projects and is estimated to have secured tens of millions of investors' funds.

Cyberscope is one of the leading smart contract audit firms in the crypto space and has built a high-profile network of clients and partners.



The Cyberscope team

<https://www.cyberscope.io>



Cyberscope

Audit Report

Mobsterblox

April 2023

Network BSC

Address 0x79a7F4236F344f58c0D1c15b642dCCa5b47e681b

Audited by © cyberscope

Table of Contents

Table of Contents	1
Review	3
Audit Updates	3
Source Files	3
Findings Breakdown	4
Analysis	5
ELFM - Exceeds Fees Limit	6
Description	6
Recommendation	7
BC - Blacklists Addresses	8
Description	8
Recommendation	8
Diagnostics	9
PTRP - Potential Transfer Revert Propagation	11
Description	11
Recommendation	11
CR - Code Repetition	12
Description	12
Recommendation	13
GO - Gas Optimization	14
Description	14
Recommendation	14
RSML - Redundant SafeMath Library	15
Description	15
Recommendation	15
RSK - Redundant Storage Keyword	16
Description	16
Recommendation	16
IDI - Immutable Declaration Improvement	17
Description	17
Recommendation	17
L02 - State Variables could be Declared Constant	18
Description	18
Recommendation	18
L04 - Conformance to Solidity Naming Conventions	19
Description	19
Recommendation	20
L05 - Unused State Variable	21
Description	21

Recommendation	21
L07 - Missing Events Arithmetic	22
Description	22
Recommendation	22
L08 - Tautology or Contradiction	23
Description	23
Recommendation	24
L09 - Dead Code Elimination	25
Description	25
Recommendation	25
L13 - Divide before Multiply Operation	26
Description	26
Recommendation	26
L15 - Local Scope Variable Shadowing	27
Description	27
Recommendation	27
L16 - Validate Variable Setters	28
Description	28
Recommendation	28
L17 - Usage of Solidity Assembly	29
Description	29
Recommendation	29
L20 - Succeeded Transfer Check	30
Description	30
Recommendation	30
Functions Analysis	31
Inheritance Graph	40
Flow Graph	41
Summary	42
Disclaimer	43
About Cyberscope	44

Review

Contract Name	Token
Compiler Version	v0.8.6+commit.11564f7e
Optimization	200 runs
Explorer	https://bscscan.com/address/0x79a7f4236f344f58c0d1c15b642dcca5b47e681b
Address	0x79a7f4236f344f58c0d1c15b642dcca5b47e681b
Network	BSC
Symbol	MOBLOX
Decimals	18
Total Supply	1,000,000,000,000,000


Audit Updates

Initial Audit	11 Apr 2023
---------------	-------------

Source Files

Filename	SHA256
Token.sol	0f3008b5dd7731a5197d4ddda7b7e1428cdc3ea05c24c87b492fc62f8fd1f99d

Findings Breakdown



Critical	1
Medium	1
Minor / Informative	17

Severity	Unresolved	Acknowledged	Resolved	Other
Critical	1	0	0	0
Medium	1	0	0	0
Minor / Informative	17	0	0	0

Analysis

● Critical ● Medium ● Minor / Informative ● Pass

Severity	Code	Description	Status
●	ST	Stops Transactions	Passed
●	OCTD	Transfers Contract's Tokens	Passed
●	OTUT	Transfers User's Tokens	Passed
●	ELFM	Exceeds Fees Limit	Unresolved
●	ULTW	Transfers Liquidity to Team Wallet	Passed
●	MT	Mints Tokens	Passed
●	BT	Burns Tokens	Passed
●	BC	Blacklists Addresses	Unresolved

ELFM - Exceeds Fees Limit

Criticality	Critical
Location	Token.sol#L1189
Status	Unresolved

Description

The contract owner has the authority to increase over the allowed limit of 25%. The owner may take advantage of it by calling the `setAllFeePercent` function with a high percentage value.

```
function setAllFeePercent(uint8 taxFee, uint8 liquidityFee, uint8 burnFee,
uint8 walletFee, uint8 buybackFee, uint8 walletCharityFee, uint8
rewardFee) external onlyOwner() {
    require(taxFee >= 0 && taxFee <=maxTaxFee,"TF err");
    require(liquidityFee >= 0 && liquidityFee <=maxLiqFee,"LF err");
    require(burnFee >= 0 && burnFee <=maxBurnFee,"BF err");
    require(walletFee >= 0 && walletFee <=maxWalletFee,"WF err");
    require(buybackFee >= 0 && buybackFee <=maxBuybackFee,"BBF err");
    require(walletCharityFee >= 0 && walletCharityFee <=maxWalletFee,"WFT
err");
    require(rewardFee >= 0 && rewardFee <=maxTaxFee,"RF err");
    //both tax fee and reward fee cannot be set
    require(rewardFee == 0 || taxFee == 0,"RT fee err");
    _taxFee = taxFee;
    _liquidityFee = liquidityFee;
    _burnFee = burnFee;
    _buybackFee = buybackFee;
    _walletFee = walletFee;
    _walletCharityFee = walletCharityFee;
    _rewardFee = rewardFee;
}
```

Recommendation

The contract could embody a check for the maximum acceptable value. The team should carefully manage the private keys of the owner's account. We strongly recommend a powerful security mechanism that will prevent a single user from accessing the contract admin functions. Some suggestions are:

- Introduce a time-locker mechanism with a reasonable delay.
- Introduce a multi-sign wallet so that many addresses will confirm the action.
- Introduce a governance model where users will vote about the actions.
- Renouncing the ownership will eliminate the threats but it is non-reversible.

BC - Blacklists Addresses

Criticality	Medium
Location	Token.sol#L2007
Status	Unresolved

Description

The contract owner has the authority to stop addresses from transactions. The owner may take advantage of it by calling the `blacklistAddress` function.

```
function blacklistAddress(address account, bool value) external onlyOwner
{
    _isBlacklisted[account] = value;
}
```

Recommendation

The team should carefully manage the private keys of the owner's account. We strongly recommend a powerful security mechanism that will prevent a single user from accessing the contract admin functions. Some suggestions are:

- Introduce a time-locker mechanism with a reasonable delay.
- Introduce a multi-sign wallet so that many addresses will confirm the action.
- Introduce a governance model where users will vote about the actions.
- Renouncing the ownership will eliminate the threats but it is non-reversible.

Diagnostics

● Critical ● Medium ● Minor / Informative

Severity	Code	Description	Status
●	PTRP	Potential Transfer Revert Propagation	Unresolved
●	CR	Code Repetition	Unresolved
●	GO	Gas Optimization	Unresolved
●	RSML	Redundant SafeMath Library	Unresolved
●	RSK	Redundant Storage Keyword	Unresolved
●	IDI	Immutable Declaration Improvement	Unresolved
●	L02	State Variables could be Declared Constant	Unresolved
●	L04	Conformance to Solidity Naming Conventions	Unresolved
●	L05	Unused State Variable	Unresolved
●	L07	Missing Events Arithmetic	Unresolved
●	L08	Tautology or Contradiction	Unresolved
●	L09	Dead Code Elimination	Unresolved
●	L13	Divide before Multiply Operation	Unresolved
●	L15	Local Scope Variable Shadowing	Unresolved

●	L16	Validate Variable Setters	Unresolved
●	L17	Usage of Solidity Assembly	Unresolved
●	L20	Succeeded Transfer Check	Unresolved

PTRP - Potential Transfer Revert Propagation

Criticality	Minor / Informative
Location	Token.sol#L1469,1494
Status	Unresolved

Description

The contract sends funds to a `feeWallet` and a `feeWalletCharity` as part of the transfer flow. These addresses can either be a wallet address or a contract. If the address belongs to a contract then it may revert from incoming payment. As a result, the error will propagate to the token's contract and revert the transfer.

```
transferEth(feeWallet, newBalance);  
transferEth(feeWalletCharity, newBalance);
```

Recommendation

The contract should tolerate the potential revert from the underlying contracts when the interaction is part of the main transfer flow. This could be achieved by not allowing set contract addresses or by sending the funds in a non-revertable way.

CR - Code Repetition

Criticality	Minor / Informative
Location	Token.sol#L1456,1480
Status	Unresolved

Description

The contract contains repetitive code segments. There are potential issues that can arise when using code segments in Solidity. Some of them can lead to issues like gas efficiency, complexity, readability, security, and maintainability of the source code. It is generally a good idea to try to minimize code repetition where possible.

The same code is executed for both `_walletFee` and `_walletCharityFee`. As a result, the contract has duplicate code segments.

```
if(_walletFee != 0){
    spentAmount = contractTokenBalance.div(totFee).mul(_walletFee);
    if(!_walletFeeInBNB){
        uint256 currentBalance = balanceOf(feeWallet);
        _tokenTransferNoFee(address(this), feeWallet, spentAmount);
        setBalance(payable(feeWallet), balanceOf(feeWallet), currentBalance);
    }
    else{
        uint256 initialBalance = address(this).balance;
        // swap tokens for ETH
        swapTokensForBNB(spentAmount);
        // how much ETH did we just swap into?
        uint256 newBalance = address(this).balance.sub(initialBalance);
        transferEth(feeWallet, newBalance);
    }
    totSpentAmount = totSpentAmount + spentAmount;
}
```

Recommendation

The team is advised to avoid repeating the same code in multiple places, which can make the contract easier to read and maintain. The authors could try to reuse code wherever possible, as this can help reduce the complexity and size of the contract. For instance, the contract could reuse the common code segments in an internal function in order to avoid repeating the same code in multiple places.

GO - Gas Optimization

Criticality	Minor / Informative
Location	Token.sol#L1444
Status	Unresolved

Description

There are code segments that could be optimized. A segment may be optimized so that it becomes a smaller size, consumes less memory, executes more rapidly, or performs fewer operations.

The `swapAndLiquify` function can swap tokens up to 5 times. Swapping tokens involves executing external contract calls, which are expensive in terms of gas cost. As a result, each time the `swapAndLiquify` function is executed the transaction might include increased gas costs.

```
swapTokensForBNB(spentAmount);
```

Recommendation

The team is advised to take these segments into consideration and rewrite them so the runtime will be more performant. That way it will improve the efficiency and performance of the source code and reduce the cost of executing it.

RSML - Redundant SafeMath Library

Criticality	Minor / Informative
Location	Token.sol
Status	Unresolved

Description

SafeMath is a popular Solidity library that provides a set of functions for performing common arithmetic operations in a way that is resistant to integer overflows and underflows.

Starting with Solidity versions that are greater than or equal to 0.8.0, the arithmetic operations revert to underflow and overflow. As a result, the native functionality of the Solidity operations replaces the SafeMath library. Hence, the usage of the SafeMath library adds complexity, and overhead and increases gas consumption unnecessarily.

```
library SafeMath {...}
```

Recommendation

The team is advised to remove the SafeMath library. Since the version of the contract is greater than `0.8.0` then the pure Solidity arithmetic operations produce the same result.

If the previous functionality is required, then the contract could exploit the `unchecked { ... }` statement.

Read more about the breaking change at

<https://docs.soliditylang.org/en/v0.8.16/080-breaking-changes.html#solidity-v0-8-0-breaking-changes>.

RSK - Redundant Storage Keyword

Criticality	Minor / Informative
Location	Token.sol#L331,335,342,348
Status	Unresolved

Description

The contract uses the `storage` keyword in a view function. The `storage` keyword is used to persist data on the contract's storage. View functions are functions that do not modify the state of the contract and do not perform any actions that cost gas (such as sending a transaction). As a result, the use of the `storage` keyword in view functions is redundant.

```
Map storage map
```

Recommendation

It is generally considered good practice to avoid using the `storage` keyword in view functions because it is unnecessary and can make the code less readable.

IDI - Immutable Declaration Improvement

Criticality	Minor / Informative
Location	Token.sol#L996,997,998,999,1009,1019
Status	Unresolved

Description

The contract is using variables that initialize them only in the constructor. The other functions are not mutating the variables. These variables are not defined as `immutable`.

```
_name  
_symbol  
_decimals  
_tTotal  
rewardToken  
numTokensSellToAddToLiquidity
```

Recommendation

By declaring a variable as immutable, the Solidity compiler is able to make certain optimizations. This can reduce the amount of storage and computation required by the contract, and make it more gas-efficient.

L02 - State Variables could be Declared Constant

Criticality	Minor / Informative
Location	Token.sol#L846,848,849,850,851,852,853,854,899,908
Status	Unresolved

Description

State variables can be declared as constant using the constant keyword. This means that the value of the state variable cannot be changed after it has been set. Additionally, the constant variables decrease gas consumption of the corresponding transaction.

```
address dead = 0x0000000000000000000000000000000000000000000000000000000000000000dEaD
uint8 public maxLiqFee = 10
uint8 public maxTaxFee = 10
uint8 public maxBurnFee = 10
uint8 public maxWalletFee = 10
uint8 public maxBuybackFee = 10
uint8 public minMxTxPercentage = 1
uint8 public minMxWalletPercentage = 1
address public router = 0x10ED43C718714eb63d5aA57B78B54704E256024E
bool public mintedByUnicarve = true
```

Recommendation

Constant state variables can be useful when the contract wants to ensure that the value of a state variable cannot be changed by any function in the contract. This can be useful for storing values that are important to the contract's behavior, such as the contract's address or the maximum number of times a certain function can be called. The team is advised to add the constant keyword to state variables that never change.

L04 - Conformance to Solidity Naming Conventions

Criticality	Minor / Informative
Location	Token.sol#L699,861,862,904,910,911,914,917,920,923,926,929,932,946,947,951,1230,1253,1313,1319,1740,1744,1748,1752,1835
Status	Unresolved

Description

The Solidity style guide is a set of guidelines for writing clean and consistent Solidity code. Adhering to a style guide can help improve the readability and maintainability of the Solidity code, making it easier for others to understand and work with.

The followings are a few key points from the Solidity style guide:

1. Use camelCase for function and variable names, with the first letter in lowercase (e.g., myVariable, updateCounter).
2. Use PascalCase for contract, struct, and enum names, with the first letter in uppercase (e.g., MyContract, UserStruct, ErrorEnum).
3. Use uppercase for constant variables and enums (e.g., MAX_VALUE, ERROR_CODE).
4. Use indentation to improve readability and structure.
5. Use spaces between operators and after commas.
6. Use comments to explain the purpose and behavior of the code.
7. Keep lines short (around 120 characters) to improve readability.

```
function WETH() external pure returns (address);
uint256 public _tDividendTotal = 0
uint256 internal constant magnitude = 2**128
uint256 public _tTotal
string public _name
string public _symbol
uint8 public _taxFee = 0
uint8 public _rewardFee = 0
uint8 public _liquidityFee = 0
uint8 public _burnFee = 0
uint8 public _walletFee = 0
uint8 public _walletCharityFee = 0
uint8 public _buybackFee = 0
uint256 public _maxTxAmount

...
```

Recommendation

By following the Solidity naming convention guidelines, the codebase increased the readability, maintainability, and makes it easier to work with.

Find more information on the Solidity documentation

<https://docs.soliditylang.org/en/v0.8.17/style-guide.html#naming-convention>.

L05 - Unused State Variable

Criticality	Minor / Informative
Location	Token.sol#L250
Status	Unresolved

Description

An unused state variable is a state variable that is declared in the contract, but is never used in any of the contract's functions. This can happen if the state variable was originally intended to be used, but was later removed or never used.

Unused state variables can create clutter in the contract and make it more difficult to understand and maintain. They can also increase the size of the contract and the cost of deploying and interacting with it.

```
int256 private constant MAX_INT256 = ~(int256(1) << 255)
```

Recommendation

To avoid creating unused state variables, it's important to carefully consider the state variables that are needed for the contract's functionality, and to remove any that are no longer needed. This can help improve the clarity and efficiency of the contract.

L07 - Missing Events Arithmetic

Criticality	Minor / Informative
Location	Token.sol#L1199,1213,1218,1225,1255,1999
Status	Unresolved

Description

Events are a way to record and log information about changes or actions that occur within a contract. They are often used to notify external parties or clients about events that have occurred within the contract, such as the transfer of tokens or the completion of a task.

It's important to carefully design and implement the events in a contract, and to ensure that all required events are included. It's also a good idea to test the contract to ensure that all events are being properly triggered and logged.

```
_taxFee = taxFee
buyBackUpperLimit = buyBackLimit * 10**18

_maxTxAmount = _tTotal.mul(maxTxPercent).div(
    10**4
)

_maxWalletAmount = _tTotal.mul(maxWalletPercent).div(
    10**4
)
minimumTokenBalanceForDividends = _minimumTokenBalanceForDividends
gasForProcessing = newValue
```

Recommendation

By including all required events in the contract and thoroughly testing the contract's functionality, the contract ensures that it performs as intended and does not have any missing events that could cause issues with its arithmetic.

L08 - Tautology or Contradiction

Criticality	Minor / Informative
Location	Token.sol#L1038,1039,1040,1041,1042,1043,1044,1190,1191,1192,1193,1194,1195,1196
Status	Unresolved

Description

A tautology is a logical statement that is always true, regardless of the values of its variables. A contradiction is a logical statement that is always false, regardless of the values of its variables.

Using tautologies or contradictions can lead to unintended behavior and can make the code harder to understand and maintain. It is generally considered good practice to avoid tautologies and contradictions in the code.

```
require(fee.setTaxFee >= 0 && fee.setTaxFee <=maxTaxFee,"TF err")
require(fee.setLiqFee >= 0 && fee.setLiqFee <=maxLiqFee,"LF err")
require(fee.setBurnFee >= 0 && fee.setBurnFee <=maxBurnFee,"BF err")
require(fee.setWalletFee >= 0 && fee.setWalletFee <=maxWalletFee,"WF err")
require(fee.setBuybackFee >= 0 && fee.setBuybackFee <=maxBuybackFee,"BBF
err")
require(fee.setWalletCharityFee >= 0 && fee.setWalletCharityFee
<=maxWalletFee,"WFT err")
require(fee.setRewardFee >= 0 && fee.setRewardFee <=maxTaxFee,"RF err")
require(taxFee >= 0 && taxFee <=maxTaxFee,"TF err")
require(liquidityFee >= 0 && liquidityFee <=maxLiqFee,"LF err")
require(burnFee >= 0 && burnFee <=maxBurnFee,"BF err")
require(walletFee >= 0 && walletFee <=maxWalletFee,"WF err")
require(buybackFee >= 0 && buybackFee <=maxBuybackFee,"BBF err")
require(walletCharityFee >= 0 && walletCharityFee <=maxWalletFee,"WFT
err")
require(rewardFee >= 0 && rewardFee <=maxTaxFee,"RF err")
```

Recommendation

The team is advised to carefully consider the logical conditions is using in the code and ensure that it is well-defined and make sense in the context of the smart contract.

L09 - Dead Code Elimination

Criticality	Minor / Informative
Location	Token.sol#L296,331,405,432,458,468,483,493,498,534,538,549,560,565,576,1762
Status	Unresolved

Description

In Solidity, dead code is code that is written in the contract, but is never executed or reached during normal contract execution. Dead code can occur for a variety of reasons, such as:

- Conditional statements that are always false.
- Functions that are never called.
- Unreachable code (e.g., code that follows a return statement).

Dead code can make a contract more difficult to understand and maintain, and can also increase the size of the contract and the cost of deploying and interacting with it.

```
function abs(int256 a) internal pure returns (int256) {
    require(a != MIN_INT256);
    return a < 0 ? -a : a;
}

function get(Map storage map, address key) internal view returns (uint) {
    return map.values[key];
}

...
```

Recommendation

To avoid creating dead code, it's important to carefully consider the logic and flow of the contract and to remove any code that is not needed or that is never executed. This can help improve the clarity and efficiency of the contract.

L13 - Divide before Multiply Operation

Criticality	Minor / Informative
Location	Token.sol#L1451,1457,1475,1481,1500
Status	Unresolved

Description

It is important to be aware of the order of operations when performing arithmetic calculations. This is especially important when working with large numbers, as the order of operations can affect the final result of the calculation. Performing divisions before multiplications may cause a loss of prediction.

```
spentAmount = contractTokenBalance.div(totFee).mul(_walletFee)
```

Recommendation

To avoid this issue, it is recommended to carefully consider the order of operations when performing arithmetic calculations in Solidity. It's generally a good idea to use parentheses to specify the order of operations. The basic rule is that the multiplications should be prior to the divisions.

L15 - Local Scope Variable Shadowing

Criticality	Minor / Informative
Location	Token.sol#L1740,1744,1748,1752
Status	Unresolved

Description

Local scope variable shadowing occurs when a local variable with the same name as a variable in an outer scope is declared within a function or code block. When this happens, the local variable "shadows" the outer variable, meaning that it takes precedence over the outer variable within the scope in which it is declared.

```
address _owner
```

Recommendation

It's important to be aware of shadowing when working with local variables, as it can lead to confusion and unintended consequences if not used correctly. It's generally a good idea to choose unique names for local variables to avoid shadowing outer variables and causing confusion.

L16 - Validate Variable Setters

Criticality	Minor / Informative
Location	Token.sol#L1009
Status	Unresolved

Description

The contract performs operations on variables that have been configured on user-supplied input. These variables are missing of proper check for the case where a value is zero. This can lead to problems when the contract is executed, as certain actions may not be properly handled when the value is zero.

```
rewardToken = _rewardToken
```

Recommendation

By adding the proper check, the contract will not allow the variables to be configured with zero value. This will ensure that the contract can handle all possible input values and avoid unexpected behavior or errors. Hence, it can help to prevent the contract from being exploited or operating unexpectedly.

L17 - Usage of Solidity Assembly

Criticality	Minor / Informative
Location	Token.sol#L412,511
Status	Unresolved

Description

Using assembly can be useful for optimizing code, but it can also be error-prone. It's important to carefully test and debug assembly code to ensure that it is correct and does not contain any errors.

Some common types of errors that can occur when using assembly in Solidity include Syntax, Type, Out-of-bounds, Stack, and Revert.

```
assembly { codehash := extcodehash(account) }

assembly {
    let returndata_size := mload(returndata)
    revert(add(32, returndata), returndata_size)
}
```

Recommendation

It is recommended to use assembly sparingly and only when necessary, as it can be difficult to read and understand compared to Solidity code.

L20 - Succeeded Transfer Check

Criticality	Minor / Informative
Location	Token.sol#L1696
Status	Unresolved

Description

According to the ERC20 specification, the transfer methods should be checked if the result is successful. Otherwise, the contract may wrongly assume that the transfer has been established.

```
IERC20(tokenAddress).transfer(owner(), tokenAmount)
```

Recommendation

The contract should check if the result of the transfer methods is successful. The team is advised to check the SafeERC20 library from the [Openzeppelin library](#).

Functions Analysis

Contract	Type	Bases		
	Function Name	Visibility	Mutability	Modifiers
IERC20	Interface			
	totalSupply	External		-
	balanceOf	External		-
	transfer	External	✓	-
	allowance	External		-
	approve	External	✓	-
	transferFrom	External	✓	-
SafeMath	Library			
	add	Internal		
	sub	Internal		
	sub	Internal		
	mul	Internal		
	div	Internal		
	div	Internal		
	mod	Internal		
	mod	Internal		

Context	Implementation			
	_msgSender	Internal		
	_msgData	Internal		
SafeMathInt	Library			
	mul	Internal		
	div	Internal		
	sub	Internal		
	add	Internal		
	abs	Internal		
	toUint256Safe	Internal		
SafeMathUint	Library			
	toInt256Safe	Internal		
IterableMapping	Library			
	get	Internal		
	getIndexOfKey	Internal		
	getKeyAtIndex	Internal		
	size	Internal		
	set	Internal	✓	
	remove	Internal	✓	

Address	Library			
	isContract	Internal		
	sendValue	Internal	✓	
	functionCall	Internal	✓	
	functionCall	Internal	✓	
	functionCallWithValue	Internal	✓	
	functionCallWithValue	Internal	✓	
	_functionCallWithValue	Private	✓	
SafeERC20	Library			
	safeTransfer	Internal	✓	
	safeTransferFrom	Internal	✓	
	safeApprove	Internal	✓	
	safeIncreaseAllowance	Internal	✓	
	safeDecreaseAllowance	Internal	✓	
	_callOptionalReturn	Private	✓	
Ownable	Implementation	Context		
		Public	✓	-
	owner	Public		-
	renounceOwnership	Public	✓	onlyOwner
	transferOwnership	Public	✓	onlyOwner
	geUnlockTime	Public		-

	lock	Public	✓	onlyOwner
	unlock	Public	✓	-
IUniswapV2Factory	Interface			
	feeTo	External		-
	feeToSetter	External		-
	getPair	External		-
	allPairs	External		-
	allPairsLength	External		-
	createPair	External	✓	-
	setFeeTo	External	✓	-
	setFeeToSetter	External	✓	-
IUniswapV2Router01	Interface			
	factory	External		-
	WETH	External		-
	addLiquidity	External	✓	-
	addLiquidityETH	External	Payable	-
	removeLiquidity	External	✓	-
	removeLiquidityETH	External	✓	-
	removeLiquidityWithPermit	External	✓	-
	removeLiquidityETHWithPermit	External	✓	-
	swapExactTokensForTokens	External	✓	-

	swapTokensForExactTokens	External	✓	-
	swapExactETHForTokens	External	Payable	-
	swapTokensForExactETH	External	✓	-
	swapExactTokensForETH	External	✓	-
	swapETHForExactTokens	External	Payable	-
	quote	External		-
	getAmountOut	External		-
	getAmountIn	External		-
	getAmountsOut	External		-
	getAmountsIn	External		-
IUniswapV2Router02	Interface	IUniswapV2Router01		
	removeLiquidityETHSupportingFeeOnTransferTokens	External	✓	-
	removeLiquidityETHWithPermitSupportingFeeOnTransferTokens	External	✓	-
	swapExactTokensForTokensSupportingFeeOnTransferTokens	External	✓	-
	swapExactETHForTokensSupportingFeeOnTransferTokens	External	Payable	-
	swapExactTokensForETHSupportingFeeOnTransferTokens	External	✓	-
Token	Implementation	Context, IERC20, Ownable		
		Public	Payable	-
	name	Public		-


	updatePcsV2Router	Public	✓	onlyOwner
	symbol	Public		-
	decimals	Public		-
	totalSupply	Public		-
	balanceOf	Public		-
	transfer	Public	✓	-
	allowance	Public		-
	approve	Public	✓	-
	transferFrom	Public	✓	-
	increaseAllowance	Public	✓	-
	decreaseAllowance	Public	✓	-
	isExcludedFromReward	Public		-
	totalFees	Public		-
	deliver	Public	✓	-
	reflectionFromToken	Public		-
	tokenFromReflection	Public		-
	excludeFromReward	Public	✓	onlyOwner
	includeInReward	External	✓	onlyOwner
	excludeFromFee	Public	✓	onlyOwner
	includeInFee	Public	✓	onlyOwner
	setAllFeePercent	External	✓	onlyOwner
	buyBackUpperLimitAmount	Public		-
	setBuybackUpperLimit	External	✓	onlyOwner

	setMaxTxPercent	External	✓	onlyOwner
	setMaxWalletPercent	External	✓	onlyOwner
	setSwapAndLiquifyEnabled	Public	✓	onlyOwner
	setFeeWallet	External	✓	onlyOwner
	setFeeWalletCharity	External	✓	onlyOwner
	setWalletFeeTokenType	External	✓	onlyOwner
	setWalletCharityFeeTokenType	External	✓	onlyOwner
	setMinimumTokenBalanceForDividends	External	✓	onlyOwner
		External	Payable	-
	_reflectFee	Private	✓	
	_getValues	Private		
	_getTValues	Private		
	_getRValues	Private		
	_getRate	Private		
	_getCurrentSupply	Private		
	_takeLiquidity	Private	✓	
	calculateTaxFee	Private		
	calculateLiquidityFee	Private		
	removeAllFee	Private	✓	
	restoreAllFee	Private	✓	
	isExcludedFromFee	Public		-
	_approve	Private	✓	
	_transfer	Private	✓	


	swapAndLiquify	Private	✓	lockTheSwap
	buyBackTokens	Private	✓	lockTheSwap
	swapTokensForBNB	Private	✓	
	swapBNBForTokens	Private	✓	
	swapTokensForRewardToken	Private	✓	
	addLiquidity	Private	✓	
	_tokenTransfer	Private	✓	
	_transferStandard	Private	✓	
	_transferToExcluded	Private	✓	
	_transferFromExcluded	Private	✓	
	_transferBothExcluded	Private	✓	
	_tokenTransferNoFee	Private	✓	
	transferEth	Private	✓	
	recoverBEP20	Public	✓	onlyOwner
	distributeDividends	Internal	✓	
	withdrawDividend	Public	✓	-
	_withdrawDividendOfUser	Internal	✓	
	dividendOf	Public		-
	withdrawableDividendOf	Public		-
	withdrawnDividendOf	Public		-
	accumulativeDividendOf	Public		-
	_dtransfer	Internal	✓	
	_dmint	Internal	✓	

	_dburn	Internal	✓	
	_setBalance	Internal	✓	
	excludeFromDividends	Public	✓	onlyOwner
	updateClaimWait	External	✓	onlyOwner
	getLastProcessedIndex	External		-
	getNumberOfDividendTokenHolders	External		-
	getAccountDividendsInfo	Public		-
	getAccountDividendsInfoAtIndex	Public		-
	canAutoClaim	Private		
	setBalance	Private	✓	
	process	Public	✓	-
	processAccount	Internal	✓	
	updateGasForProcessing	Public	✓	onlyOwner
	processDividendTracker	External	✓	-
	blacklistAddress	External	✓	onlyOwner
	claim	External	✓	-

Inheritance Graph

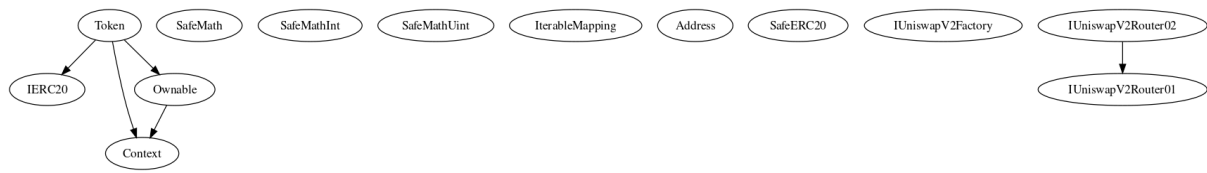

Flow Graph

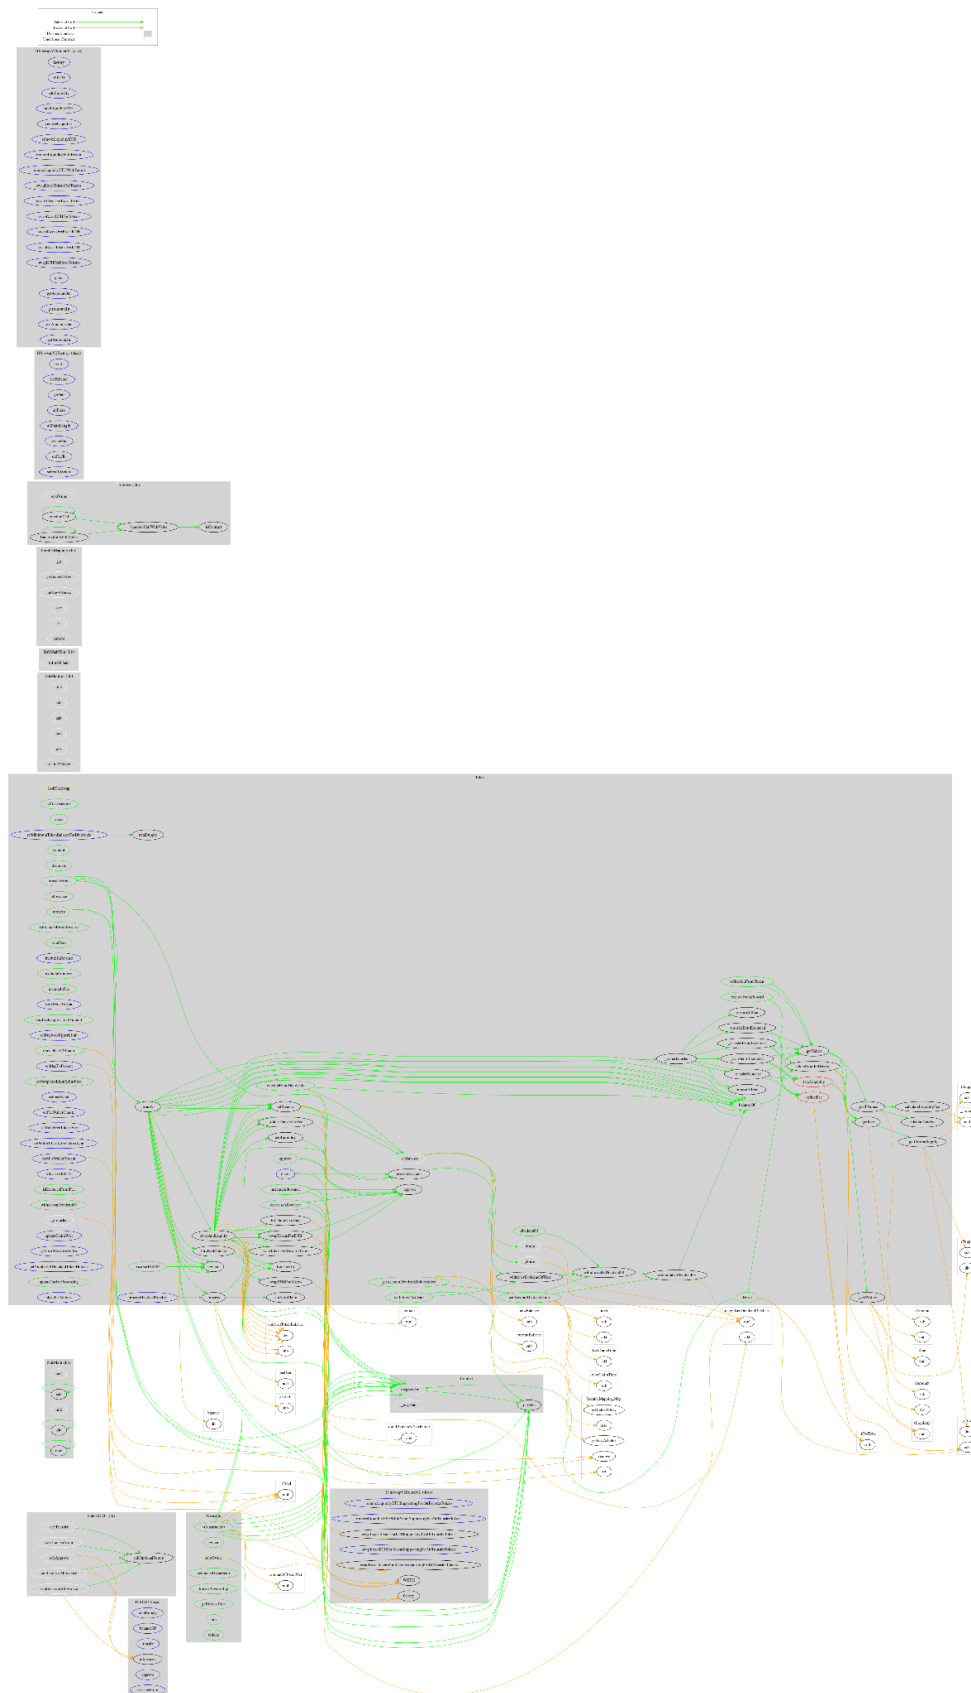

Summary

Mobsterblox contract implements a token mechanism. This audit investigates security issues, business logic concerns, and potential improvements. There are some functions that can be abused by the owner like manipulating the fees and blacklist addresses. A multi-wallet signing pattern will provide security against potential hacks. Temporarily locking the contract or renouncing ownership will eliminate all the contract threats.

Disclaimer

The information provided in this report does not constitute investment, financial or trading advice and you should not treat any of the document's content as such. This report may not be transmitted, disclosed, referred to or relied upon by any person for any purposes nor may copies be delivered to any other person other than the Company without Cyberscope's prior written consent. This report is not nor should be considered an "endorsement" or "disapproval" of any particular project or team. This report is not nor should be regarded as an indication of the economics or value of any "product" or "asset" created by any team or project that contracts Cyberscope to perform a security assessment. This document does not provide any warranty or guarantee regarding the absolute bug-free nature of the technology analyzed, nor do they provide any indication of the technologies proprietors' business, business model or legal compliance. This report should not be used in any way to make decisions around investment or involvement with any particular project. This report represents an extensive assessment process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology.

Blockchain technology and cryptographic assets present a high level of ongoing risk. Cyberscope's position is that each company and individual are responsible for their own due diligence and continuous security. Cyberscope's goal is to help reduce the attack vectors and the high level of variance associated with utilizing new and consistently changing technologies and in no way claims any guarantee of security or functionality of the technology we agree to analyze. The assessment services provided by Cyberscope are subject to dependencies and are under continuing development. You agree that your access and/or use including but not limited to any services reports and materials will be at your sole risk on an as-is where-is and as-available basis. Cryptographic tokens are emergent technologies and carry with them high levels of technical risk and uncertainty. The assessment reports could include false positives, false negatives and other unpredictable results. The services may access and depend upon multiple layers of third parties.

About Cyberscope

Cyberscope is a blockchain cybersecurity company that was founded with the vision to make web3.0 a safer place for investors and developers. Since its launch, it has worked with thousands of projects and is estimated to have secured tens of millions of investors' funds.

Cyberscope is one of the leading smart contract audit firms in the crypto space and has built a high-profile network of clients and partners.



The Cyberscope team

<https://www.cyberscope.io>